


# Product Data Sheet


## GW66700

IB Range



IP degree	IP66	Mechanical resistance	> IK10
Houseable interloc. socket	1	Houseable IB socket-outlets	63 A
Side entries	6xØ 23	Top entries	2xØ 37/48
Bottom entries	-	Glow Wire Test	850 °C
Suitable for	Heavy duty	Electrocod	2222
Impact resistance at -20 °C	20 J		

### DIMENSIONAL

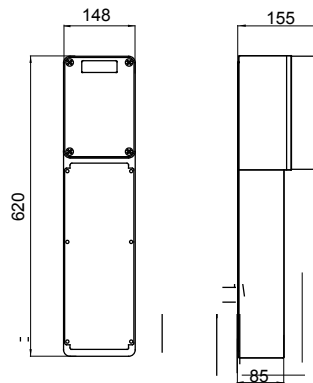

### TECHNICAL SYMBOLOGY

**IP**      **IK**      **GWT**

IP66

> IK10

850 °C

### STANDARDS/APPROVALS

