


# ALLDAY INSPIRE TWO

WQJP06599



See  
more

LED luminaire ALLDAY INSPIRE TWO, with a power of 76 W, high light efficacy 135 lm/W. It is part of the ALLDAY INSPIRE series, which is characterised by modern design, high-quality materials and a wide range of components and accessories that allow for the personalisation of the luminaires. It is made of high-quality components, supported by a 5-year warranty. Narrow beam angle 80° gives directional light so that selected objects or surfaces can be better exposed. Designed for suspended mounting.

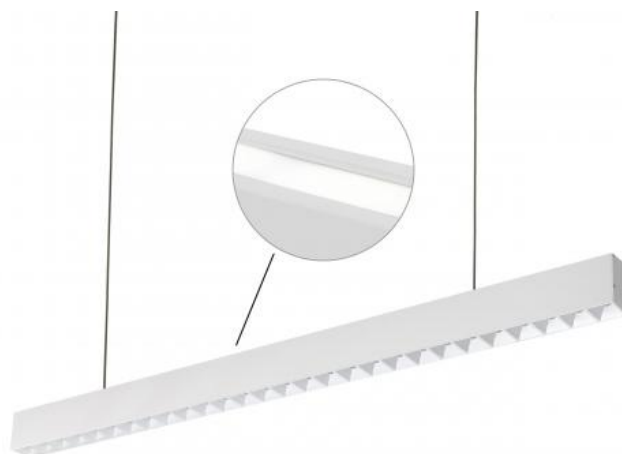

|                           |             |            |              |
|---------------------------|-------------|------------|--------------|
| Power                     | <b>76 W</b> | Voltage    | <b>230 V</b> |
| Colour of light           | <b>TW</b>   | Beam angle | <b>80 °</b>  |
| Degree of protection (IP) | <b>IP20</b> |            |              |

## Technical data

---

|                              |                   |
|------------------------------|-------------------|
| Code                         | WQJP06599         |
| Power                        | 76 W              |
| Nominal current              | 430 mA            |
| Voltage                      | 230 V             |
| Energy consumption           | 76 kWh/1000h      |
| Frequency                    | 50HZ Hz           |
| Protection class             | I                 |
| Power supply included        | Yes               |
| Manufacturer of power supply | TRIDONIC          |
| Power factor                 | 0.93              |
| Useful luminous flux*        | 10260 lm (360°)   |
| Luminous flux**              | 9000 lm (360°)    |
| Lamp efficacy                | 135 lm/W          |
| Colour of light              | TW                |
| Beam angle                   | 80 °              |
| RA                           | 80                |
| Light source included        | +                 |
| Producer of LED diodes       | SAMSUNG           |
| Uniformity of color SDCM max | 3                 |
| Dimmable                     | DALI              |
| Working temperature range    | -20/+40 °         |
| Lifespan                     | 50000 h           |
| Housing material             | Aluminum          |
| Degree of protection (IP)    | IP20              |
| Colour                       | White             |
| Dimension (AxBxC)            | 1680X44X74 mm     |
| For use                      | Inside            |
| Assembly method              | Suspended         |
| Application                  | Inside            |
| Made in                      | PL                |
| Other                        | L90B10 - 74000h , |

