





## Manual ON / Auto OFF

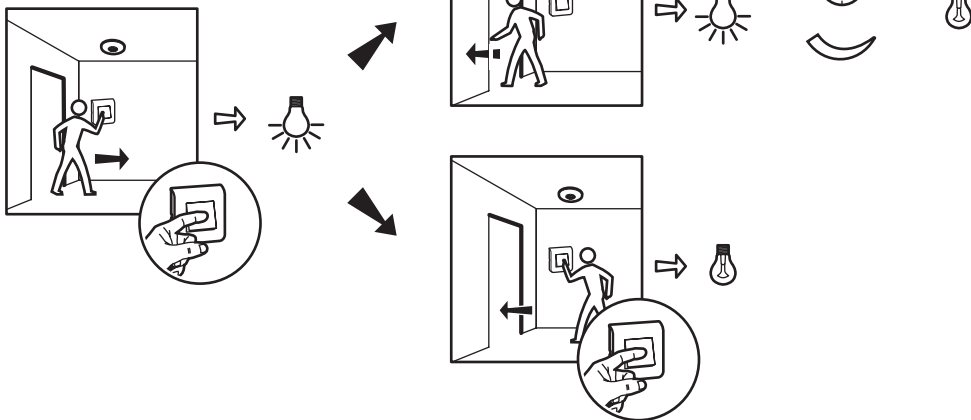

- À la première utilisation: Télécharger l'application Legrand Close Up sur l' Apple Store ou le Play Store.
- On first use: Download the Legrand Close Up app from Apple Store or Play Store
- Al primo utilizzo: Scaricare l'app Legrand Close Up su Apple Store o Play Store.

- Réf. 0 882 40 : Passerelle de configuration
- Cat. No(s) 0 882 40 : Configuration tool
- Ref. 0 882 40: Gateway di configurazione



&



Application: «Legrand Close Up»



App Store



Google Play



- Pour plus de renseignement sur les paramètres, reportez vous à la fiche technique de la passerelle de configuration Réf. 0 882 40.
- For more information about setting parameters, refer to the data sheet for the configuration gateway Cat. No. 0 882 40.
- Per maggiori informazioni sulle impostazioni, consultare la scheda tecnica del gateway di configurazione Ref. 0 882 40.


|      |  |
|------|--|
|      | 5 - 1275 lux                                       |
|      | 5 sec - 17 h 59 min 59 sec                         |
|      | 25% - 50% - 75% - 100%                             |
| Mode | Auto ON/OFF -<br>Manual On/Auto OFF - Walk-through |

- Bouton de prog. KNX
- KNX prog. push-button
- Pulsante prog. KNX
- LED KNX
- KNX LED
- LED KNX


- Cellule de luminosité
- Daylight sensor
- Cellula di luminosità

- LED d'émission/ de réception IR
- IR reception/ transmission LED
- LED di trasmissione/ ricezione IR

- LED de détection
- Motion led
- LED rilevazione movimento

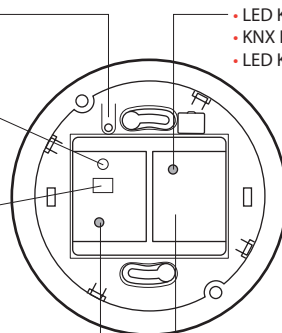

- Capteur PIR
- PIR sensor
- Sensore PIR

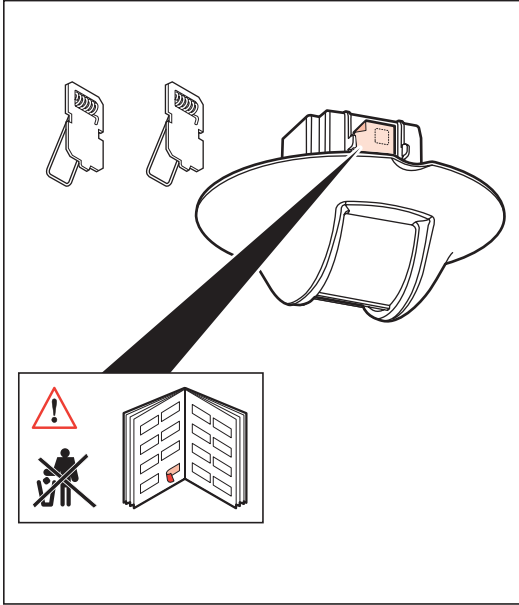

|  |   |
|--|---|
|  | 29V <sub>~</sub>  |
|  | 7 mA  |
|  | 4 x (Ø 0,6 mm < $\frac{8 \text{ mm}}{\text{pitch}}$ < Ø 0,8 mm) |
|  | -5°C → +45°C  |
|  | PIR   |
|  | 150 lux   |
|  | 15 mn   |
|  | Auto ON/OFF   |
|  | 3 m x 24 m  |

