


PRODUCT-DETAILS

# OVR T2 3N 40-350 P TS QS

## OVR T2 3N 40-350 P TS QS Surge Protective Device

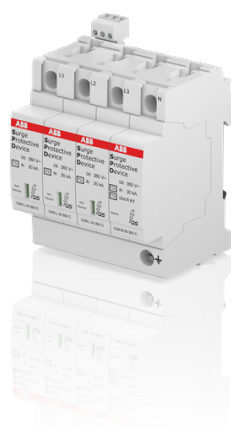

### General Information

Extended Product Type	OVR T2 3N 40-350 P TS QS
Product ID	2CTB803983R0500
EAN	3660308519979
Catalog Description	OVR T2 3N 40-350 P TS QS Surge Protective Device
Long Description	Surge protective devices SPD type 2 protect low-voltage consumer systems against surge voltages as they are tested as SPD type 2 according to IEC 61643-11. The devices are compatible with the System pro M compact series. The SPD with "TS" are optionally equipped with a auxiliary contact.

### Technical

Standards	IEC 61643-11 / EN 61643-11
Type of Low Voltage Distribution System	TT TN-S
Suitable For	To protect the systems against the transient overvoltage (lightning)
Rated Voltage ( $U_r$ )	230 V AC
Nominal AC Voltage of the System ( $U_o$ )	230 / 400 V
Voltage Rating DC	420 V
Voltage Protection Level ( $U_p$ )	1.5 kV (L-N) 1.25 kV (N-PE) 1.4 kV
Maximum Continuous Operating Voltage ( $U_c$ )	(L-PE) 350 V

Temporary Overvoltage Test Value ( $U_T$ )	(L-N) 462 V (N-PE) 1200 V
Rated Service Short-Circuit Breaking Capacity ( $I_{cs}$ )	100 kA
Discharge Current	Nominal (8 / 20 $\mu$ s) 20 kA I (max, 8 / 20 $\mu$ s) 20 kA
Impulse Current	I (imp, 10 / 350 $\mu$ s) 2 kA
Short Circuit Withstand $I_{cc}$	100 kA
Power Loss	48 mW
Short-Circuit Protective Devices	gG Type Fuses N A
Arrester Class	II
Number of Poles	4
Number of Protected Poles	4
Number of Auxiliary Contacts NC	1
Number of Auxiliary Contacts NO	1
Number of Conductors	4
Position of Neutral Terminals	Right
Transmission Standard	Optic
Version	Plug-in
Mounting Type	DIN-Rail
Product Type	QS
Options Provided	Residential, commercial building.
Auxiliary Circuit Load	Minimum 12Vdc - 10mA Maximum 250Vac - 1A
Preventive Maintenance Feature	No
Status Indicator	Yes
Fuse Size	4 modular spacing

## Environmental

Degree of Protection	IP20
Maximum Operating Altitude Permissible	Without Derating 5000
RoHS Status	Following EU Directive 2011/65/EU
RoHS Information	9AKK108466A4410
Conflict Minerals Reporting Template (CMRT)	9AKK108468A3363

## Dimensions

Width in Number of Modular Spacings	4
Product Net Width	71.2 mm
Product Net Height	95 mm
Product Net Depth / Length	58 mm
Product Net Weight	0.48 kg

---

## Ordering

---

Minimum Order Quantity	1 piece
Package Level 1 Units	box 1 piece
Package Level 1 Gross Weight	500 g

---



---

## Certificates and Declarations

---

CB Certificate	2CTC432057G1701
CQC Certificate	9AKK107680A1974
Declaration	2CTC432056G1701
Declaration of Conformity - CE	9AKK108466A4410

---



---

## Installation

---

Instructions and Manuals	2CTC432096M1701
--------------------------	-----------------

---



---

## Popular Downloads

---

Data Sheet, Technical Information	2CTC432249D0201
Mechanical Drawings	2CTC800021F1400.pdf 2CTC800021F1401.dxf 2CTC800021F1402.stp 2CTC800021F1403.igs

---



---

## Classifications

---

ETIM 8	EC000941 - Surge protection device for power supply systems
ETIM 9	EC000941 - Surge protection device for power supply systems
WEEE Category	5. Small Equipment (No External Dimension More Than 50 cm)
WEEE B2C / B2B	Business To Business
CN8	85363090
eClass	V11.0 : 27130805
Object Classification Code	141DDC

---



---

## Categories

---

Low Voltage Products and Systems → Modular DIN Rail Products → Surge Protective Devices SPDs → Surge Protective Devices SPD Class II → Type T2 40kA

