



Millau CCT Suspended Linear

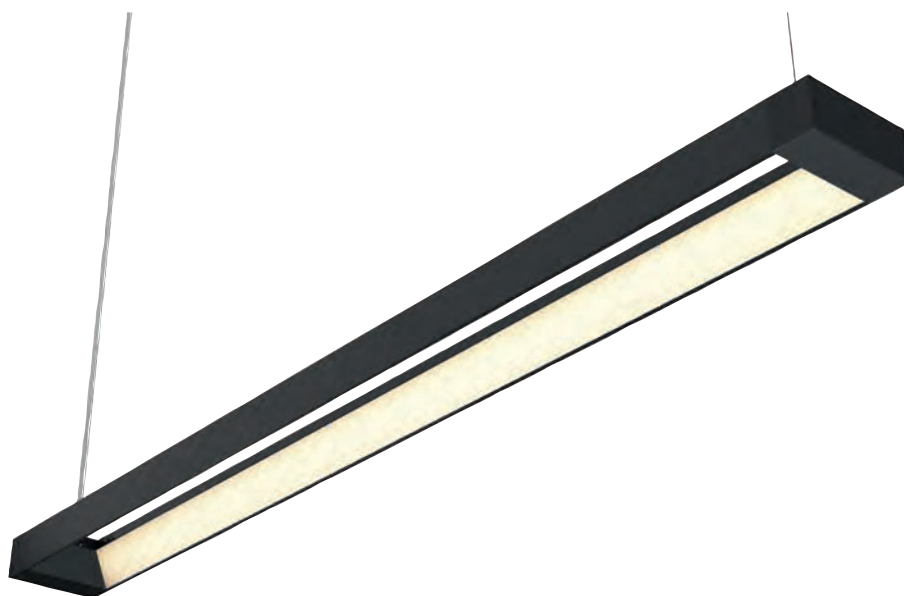

- Architectural suspended linear for commercial applications
- Black powder coated die-cast aluminium construction provides a modern and sleek appearance
- Selectable CCT between 3000K, 4000K and 6000K output
- Internal mirrored reflector and opal diffuser provide optimum distribution and light output
- Supplied with 1.5 metre suspension kit including ceiling rose
- Non-dimmable



Hollow design provides ultra-modern appearance



Top View

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
220-240V	50/60Hz	-20 to 45°C	L70 50,000	Ra 80	6	150°	1	IP20

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	UGR	A	TRADE
AMILLED4	1200mm - Selectable CCT	38W	3000K/4000K	3500lm (4000K)	93lm (4000K)	23	1222mm	£145.00
AMILLED5	1500mm - Selectable CCT	57W	3000K/4000K	4400lm (4000K)	80lm (4000K)	23	1622mm	£187.00

* UGR Value based on (4H - 8H)

