


SVK 7.10 7.10 FL30 V4A (308 229)



Figure without obligation

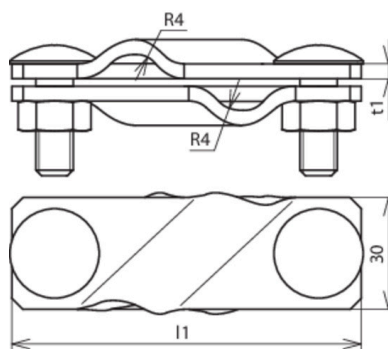

Type	SVK 7.10 7.10 FL30 V4A
Part No.	308 229
Material of clamp	StSt (V4A)
Clamping range Rd / Rd	7-10 / 7-10 mm
Clamping range Rd / FI	7-10 / 30 mm
Clamping range FI / FI	30 / 30 mm
Clamping range (stranded / cable)	50-70 mm ²
Screw	☝ M10 x 30 mm
Material of screw / nut	StSt (V4A)
Material No.	1.4571 / 1.4404 / 1.4401
Dimensions (l1 x d1)	94 x 3 mm
Lightning current carrying capability (10/350 μs)	100 kA / 50 kA ^{*)}
Standard	EN 62561-1
Short-circuit current (a.c. 50 Hz / d.c.) (1 s; ≤ 300 °C)	3.2 kA
Weight	190 g
Customs tariff number	85389099
GTIN	4013364083745
PU	25 Stk

^{*)} For exact assignment see test certificate.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.