



# Outdoor Facade Belt SQ/RD
















	EAN	L x W x H	W	lm	lm/W	K	IP	IK
Outdoor Facade Belt RD 11W/3000K GY IP54	4058075074972	60 x 240 x 142	11	400	35	3000K	54	06
Outdoor Facade Belt SQ 11W/3000K GY IP54	4058075074996	60 x 240 x 142	11	400	35	3000K	54	06

	EAN		 (°C)	PF	R <sub>a</sub>	V <sub>AC</sub>	Hz	
Outdoor Facade Belt RD 11W/3000K GY IP54	4058075074972	335°	-20...40	≥ 0.5	> 80	220-240V	50/60Hz	0.7 kg
Outdoor Facade Belt SQ 11W/3000K GY IP54	4058075074996	340°	-20...40	≥ 0.5	> 80	220-240V	50/60Hz	0.7 kg

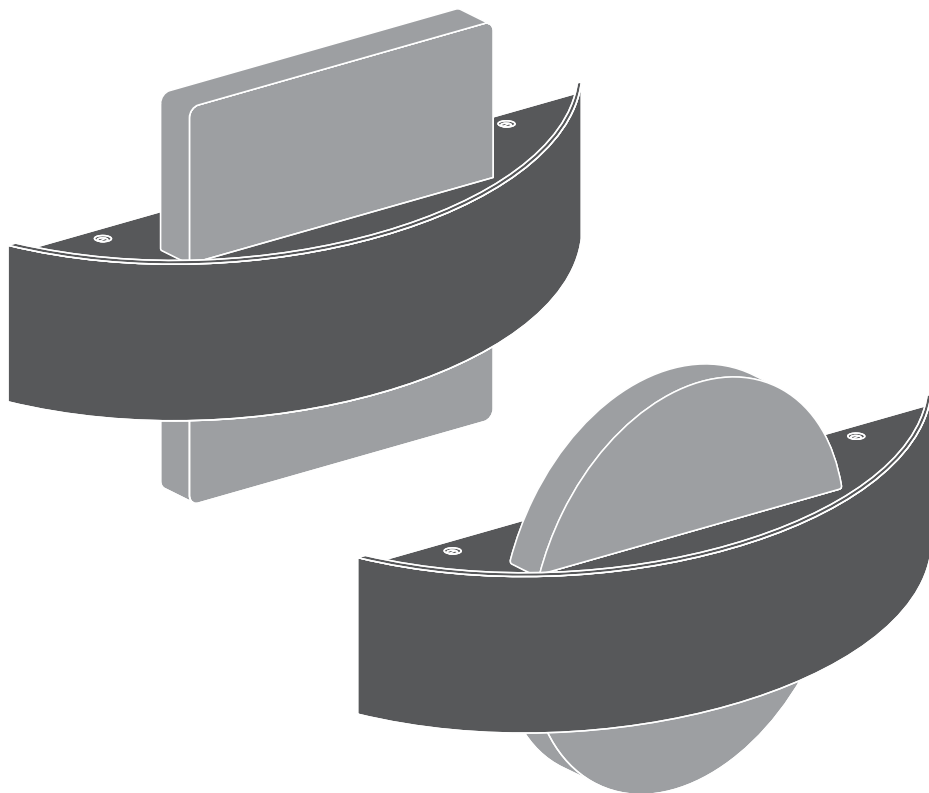

Outdoor Facade Belt SQ/RD

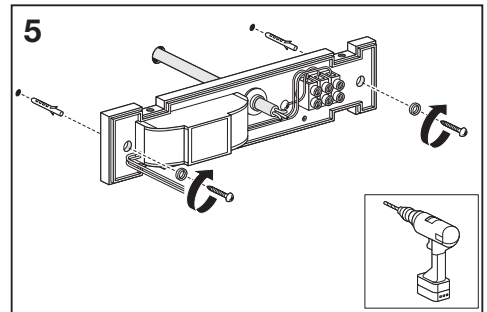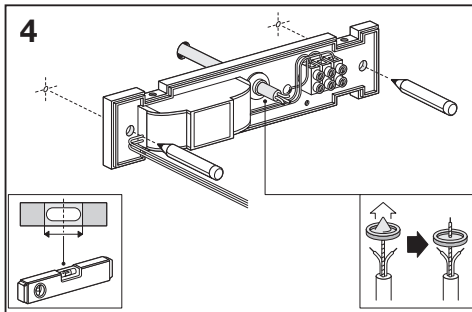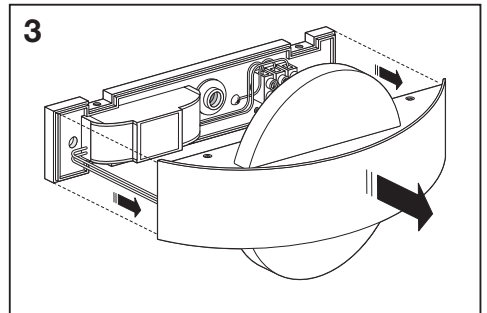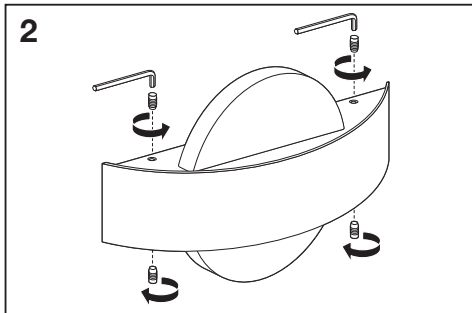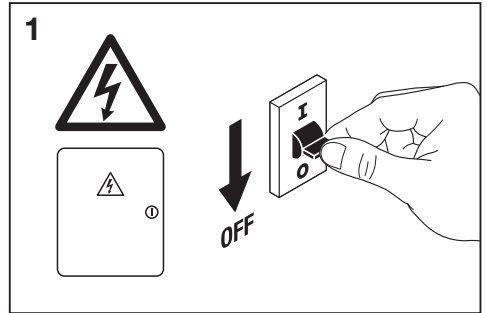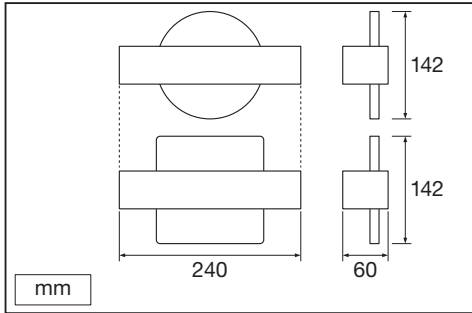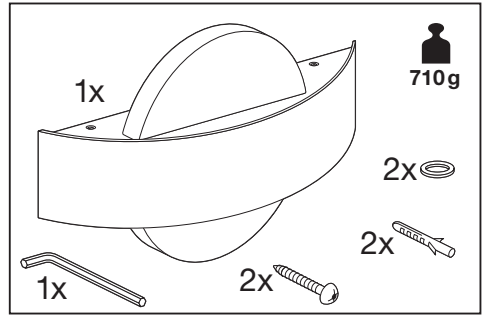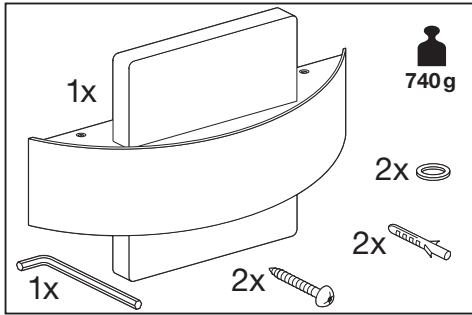

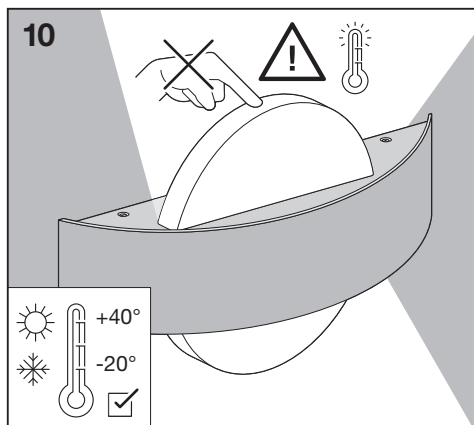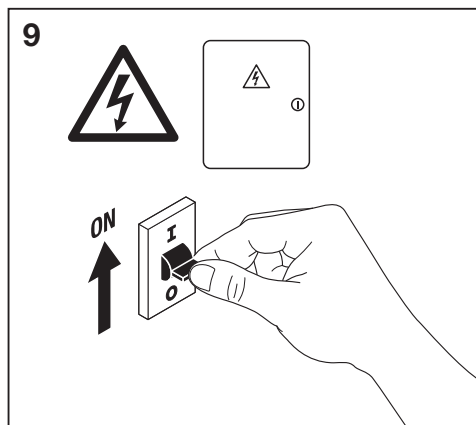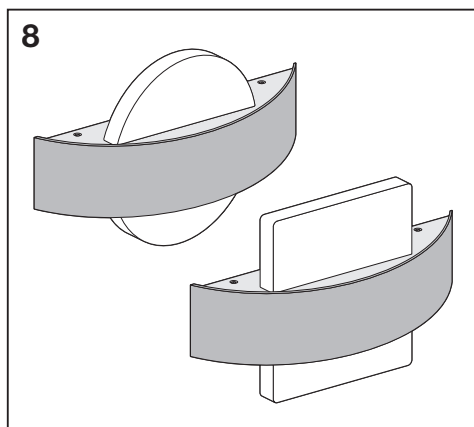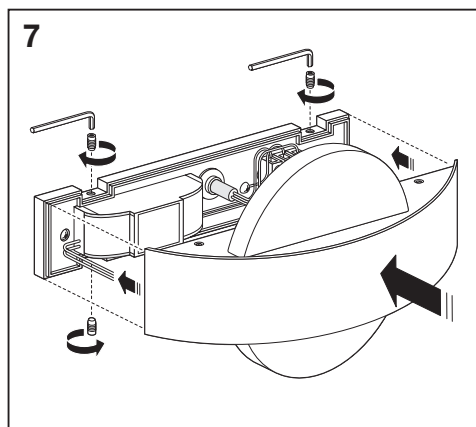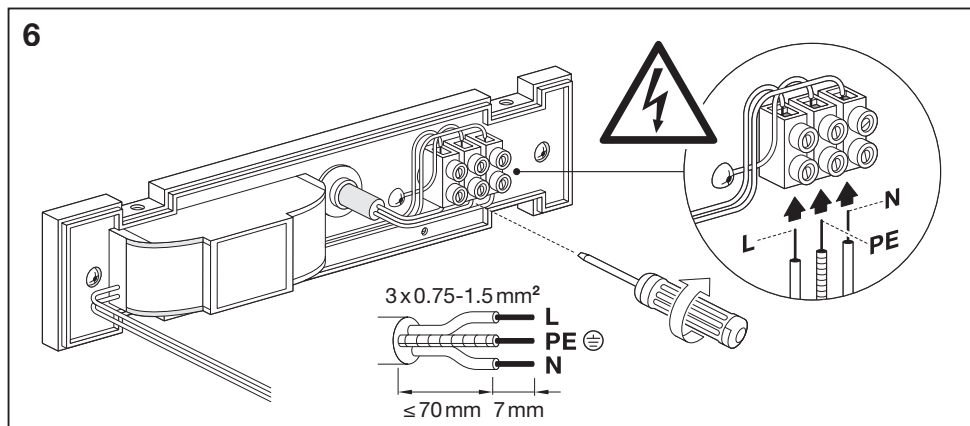

[www.luminaires.ledvance.com](http://www.luminaires.ledvance.com)



Downlight



Spot



Linear



Panel



Surface



DampProof  
IP65



HighBay



Floodlight



C10449057  
G11027762  
25.10.17

LEDVANCE GmbH  
Steinerne Furt 62  
86167 Augsburg  
Germany  
[www.ledvance.com](http://www.ledvance.com)