

LIMEA GO

SLI028035NW

Hermetic luminaire LIMEA GO, with a power of 50 W, high light efficacy 120 lm/W. It has a very high degree of protection IP65, providing protection against the ingress of dust and water jets. IK07 class provides impact resistance. It shines with light of neutral - the most universal colour (4000K). Suitable for both surface and suspended mounting. The product is certified by the National Institute of Hygiene, so it can be used in rooms with high hygienic requirements.

IP65


IK07



Power	50 W	Voltage	230 V
Luminous flux*	6000 lm (120°)	Colour temperature	4000 K
Colour of light	Neutral white	Beam angle	120 °
IK	07	Degree of protection (IP)	IP65


Technical data

Code	SLI028035NW
Power	50 W
Nominal current	240 mA
Voltage	230 V
Energy efficiency class	E
Energy consumption	50 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power factor	0.9
Useful luminous flux*	6000 lm (120°)
Luminous flux**	6000 lm (360°)
Lamp efficacy	120 lm/W
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	120 °
RA	80
Light source included	+
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	plastic
IK	07
Degree of protection (IP)	IP65
Dimension (AxBxC)	1200X60X52 mm
For use	Outside
Assembly method	On the ceiling, Suspended
Made in	PRC

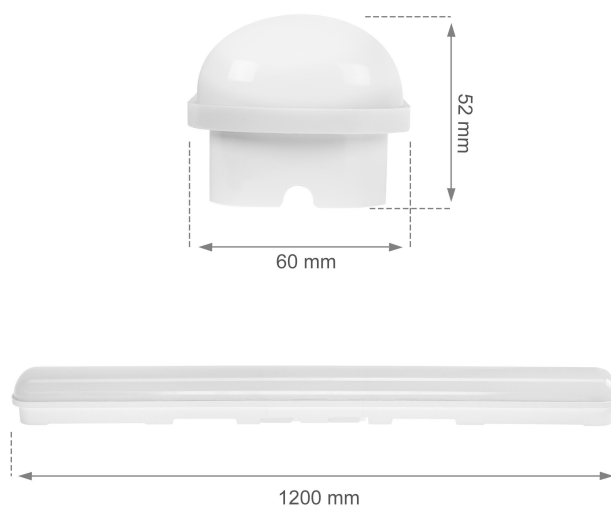

Related documents



 Declaration of Conformity



 Photometric file



 3D model

