

Product Data Sheet

DX23316R


FK Range



Pliable protective conduit system FKHF range, made of PP: classification 2322, available in seven diameters, from 16 to 63 mm, with or without cable puller. Suitable for electrical system and/or data transmission. Suitable for flush mounting installation in floors, walls and ceilings or buried in concrete. Certified Halogen Free in compliance with EN 60754-2 and Low Smoke in compliance with EN 61034-2. Suitable for applications inside false ceilings and floating floors and installations in public places: schools, cinemas, theatres, underground etc..

| | | | |
|------------------------------|--|--|-------------------------------|
| Colour | Grey RAL 7035 | Material | PP self-extinguishing |
| Type | with cable puller | Conduits Ø (mm) | 16 |
| Type of material | Halogen free in compliance with EN 60754-2 e Low smoke in compliance with EN 61034-2 | Resistance to compression | 2 (Light - 320 N) |
| Resistance to impact | 3 (Medium - 2 J) | Resistance to bending | 2 (Pliable - self recovering) |
| Electrical characteristics | 2 (With electrical insulating characteristics) | Protection against ingress of water | 0 |
| Resistance against corrosion | Not applicable to plastic conduit systems | Fire resistance | 1 (Non-flame propagating) |
| Insulation resistance | 100 MΩ a 500V for 1 minute | Protection against ingress of solid objects with GF coupling | 4 |
| Dielectric rigidity | 2000 V a 50 Hz for 15 minutes | Standard | EN 61386-1 EN 61386-22 |

DIMENSIONAL

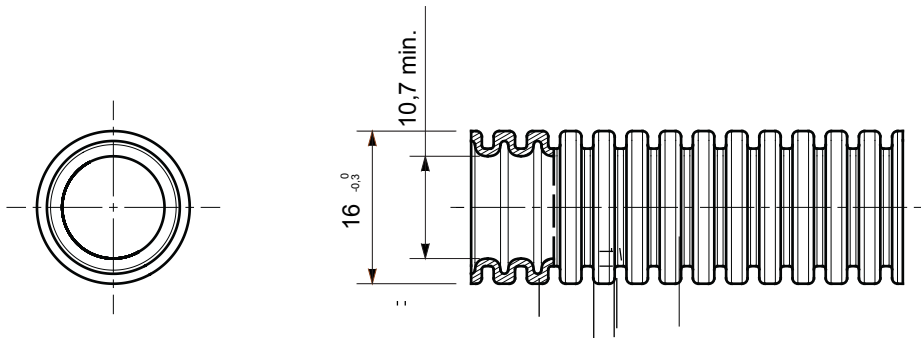

TECHNICAL SYMBOLOGY



STANDARDS/APPROVALS

