

## PHE3 30 S ZK (767 930)

- Easy transport due to detachable insulating stick (ZK) and test prod
- Insulating stick with plug-in coupling for extending the handle



Figure without obligation

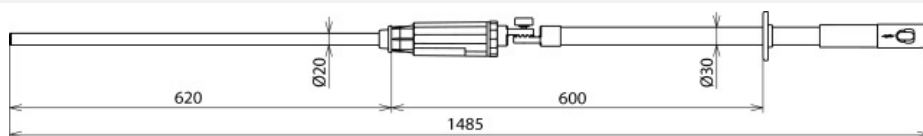


Figure without obligation

| Type                              | PHE3 30 S ZK                                |
|-----------------------------------|---------------------------------------------|
| Part No.                          | 767 930                                     |
| Nominal voltage (U <sub>n</sub> ) | 30 kV                                       |
| Type of voltage                   | a.c.                                        |
| Frequency                         | 50 Hz                                       |
| Category                          | S 62                                        |
| Total length (l <sub>o</sub> )    | 1485 mm                                     |
| Insertion depth (l <sub>i</sub> ) | 620 mm                                      |
| Length (indicator with test prod) | 850 mm                                      |
| Standard                          | EN/IEC 61243-1 (DIN VDE 0682-411)           |
| Temperature range                 | -25 °C ... +55 °C, climatic category N      |
| Design                            | Complete                                    |
| For use at                        | ▲                                           |
| For                               | Indoor and outdoor installations            |
| Application                       | Switchgear installations and overhead lines |
| Design                            | Single-pole                                 |
| Indication                        | Acoustic and visual                         |
| Self-testing element              | Yes                                         |
| Material (test electrode)         | Copper alloy/gal Sn                         |
| Material (test prod)              | Glass-fibre reinforced epoxy resin tube     |
| Material (indicator)              | Plastic, fully insulated                    |
| Material (insulating stick)       | Glass-fibre reinforced polyester tube       |
| Weight                            | 1,17 kg                                     |
| Customs tariff number             | 90303370                                    |
| GTIN                              | 4013364134775                               |
| PU                                | 1 Stk                                       |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.