


HB 205

611978.0031 | Bollards



Bollards
4051859151685
L 108, B 108, H 650

free-standing
anthracite metallic (DB703)

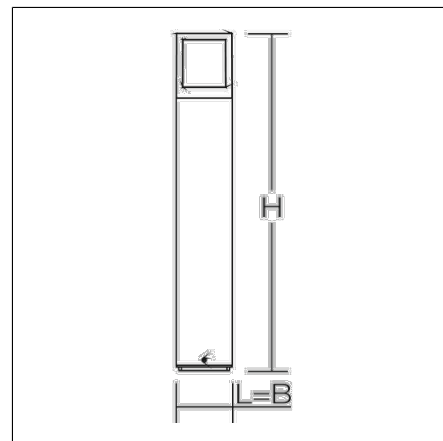

Bollard for socket mounting. Housing: die-cast aluminium, powder-coated. Diffuser: plastic (polycarbonate), opal. Driver integrated.

Product specifications

Length L	108 mm
Width B	108 mm
Height H	650 mm
Weight	3.1 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	390 lm
System power	12 W
System efficiency	33 lm/W
Glare evaluation UGR (4H 8H)	19,8
Beam angle	down 180° up 180°
Rated life	25000 h (L70/B50)
Colour rendering index (CRI)	84
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	200 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	110
Luminaires on B16A fuse	180
Inrush current / Inrush current duration	25 A / 13 µs
CIE Flux Code / CEN Flux Code	10 34 65 40 100
Type of protection	IP 54
Protection class	I
Filament test	850°C - 30 seconds
Impact resistance	IK06
Ambient temperature	-20 °C ... + 25 °C
Conformity mark	CE, EAC