

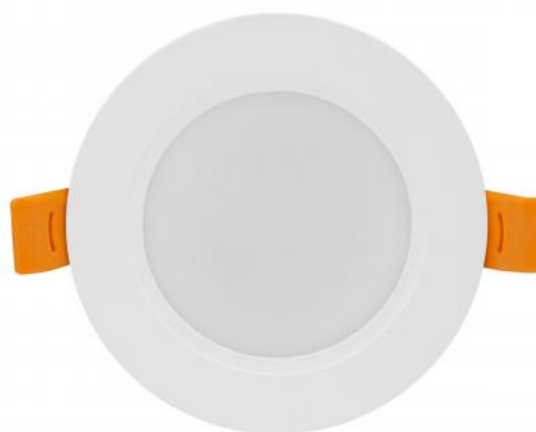
DURE 3

SLI043021CW_PW



See
more

Downlight luminaire DURE 3, with a power of 5 W, high light efficacy 130 lm/W. It has a high IP54 rating, making it ideal for use in rooms with high humidity. It shines with a cold light colour (6000K), which is suitable for rooms where we need to be most focused and concentrated, such as technical workstations. Designed for recessed mounting.

IP54**IK06**

Power	5 W	Voltage	230 V
Luminous flux*	650 lm (360°)	Colour temperature	6000 K
Colour of light	CW	Beam angle	110 °
IK	6	Degree of protection (IP)	IP54


Technical data

Code	SLI043021CW_PW
Power	5 W
Nominal current	36 mA
Voltage	230 V
Energy consumption	5 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power factor	0.6
Useful luminous flux*	650 lm (360°)
Luminous flux**	500 lm (360°)
Lamp efficacy	130 lm/W
Colour temperature	6000 K
Colour of light	CW
Beam angle	110 °
RA	80
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	PC+PS
IK	6
Degree of protection (IP)	IP54
Colour	White
Dimension (AxBxC)	95x31 mm
Mounting hole	72 mm
For use	Inside
Assembly method	Recessed
Application	INT
Made in	PRC



Related documents



 User manual




 Declaration of Conformity



 Photometric file



 3D model

