PHILIPS Lighting



HalogenA IDE

HalogenA IDE 500W E40 230V CL 1CT/6

Mains-voltage high-wattage double-envelope giving a white halogen light


Product data

General information	
Cap-Base	E40 [E40]
Operating Position	UNIVERSAL [Any or Universal (U)]
Nominal Lifetime (Nom)	2000 h
Switching Cycle	8000X
Rated Lifetime (Hours)	2000 h
Light technical	
Luminous Flux (Nom)	10250 lm
Luminous Flux (Rated) (Nom)	10250 lm
Correlated Color Temperature (Nom)	2900 K
uminous Efficacy (rated) (Nom)	20.5 lm/W
Color Rendering Index (Nom)	100
LLMF at End of Nominal Lifetime (Min)	80 %
Operating and electrical	
Power (Nom)	500.0 W
.amp Current (Nom)	2.17 A
Starting Time (Nom)	0.0 s
Warm Up Time to 60% Light (Nom)	instant full light
Power Factor (Nom)	1
Voltage (Nom)	230 V

Controls and dimming	
Dimmable	Yes
Mechanical and housing	
Bulb Finish	Clear
Bulb Shape	T38 [T 38mm]
Approval and application	
Energy Consumption kWh/1000 h	500 kWh
Product data	
Full product code	871150049126810
Order product name	HalogenA IDE 500W E40 230V CL 1CT/6
EAN/UPC - Product	8711500491268
Order code	923900144240
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	923900144240
Copy Net Weight (Piece)	141.000 g
ILCOS Code	HEGT-500-230-e40

HalogenA IDE

Dimensional drawing

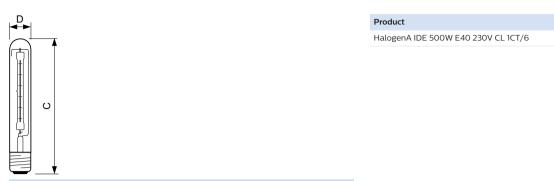

HalogenA IDE 500W E40 230V CL 1CT/6



© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2022, August 7 - data subject to change

D (max)

38.5 mm

C (max)

216 mm