

KombiSIGN 71 / Permanent Beacon 641

## Perm. light element 12-230VAC/DC BU



<b>Part No.:</b>	<b>641.500.00</b>
<b>Series:</b>	<b>KombiSIGN 71</b>



### MECHANICAL DATA

Height	66 mm
Diameter	70 mm
Materials	PC
Dome colour	Blue
Protection category	IP65
Tension relief	Not present
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	71 g
Product weight	56 g

### ELECTRICAL DATA

Operating voltage	12-230V
Operating voltage type	AC/DC
Protection class	Protection class 2
Pollution degree	3
Overvoltage category	II
Isolation voltage	Ui = 250V; Uimp = 2.500V
Power illuminant	max.5W

### OPTICAL DATA

Light source	Filament lamp
Light colour	Blue
Optical signal image	Permanent
Service life optical	depends on bulb
Lamp fitting/socket	B15d

### APPROVAL DATA

Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / Permanent Beacon 641

**Perm. light element 12-230VAC/DC BU**

Conforms with CMIM	No
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

**DRAWING**

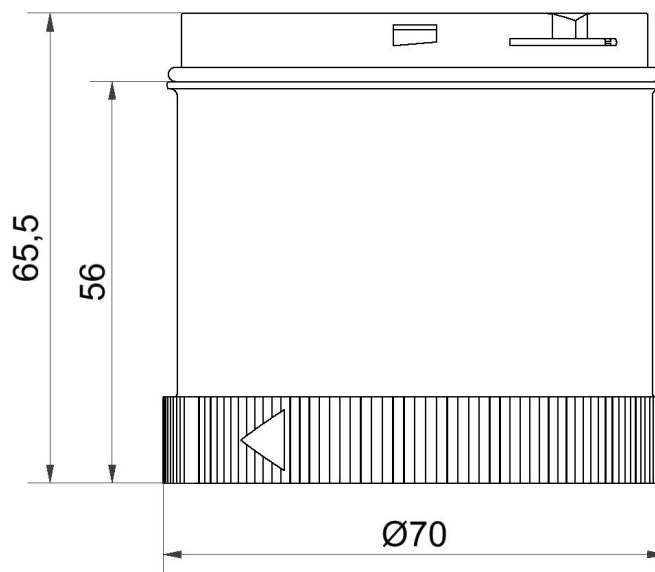

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.