


Product Data Sheet

GW66698

IB Range

IP degree	IP66	Mechanical resistance	> IK10
Houseable interloc. socket	3	Houseable IB socket-outlets	16/32 A SELV
Side entries	2xØ 23	Top entries	5xØ 23/29
Bottom entries	1xØ 29/37	Glow Wire Test	850 °C
Suitable for	Heavy duty	Electrocod	2222
Impact resistance at -20 °C	20 J		

DIMENSIONAL

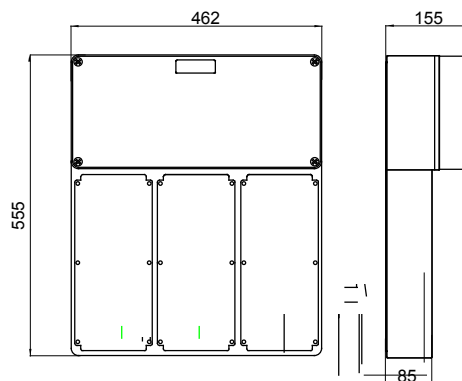

TECHNICAL SYMBOLOGY

IP **IK** **GWT**

IP66

> IK10

850 °C

STANDARDS/APPROVALS

