

# TORRE RING CCT

SLI003027CCT\_PW




See  
more

LED luminaire TORRE RING CCT with the possibility of changing the light color (CCT), with a power of 9 W, high light efficacy 111 lm/W. Thanks to the ability to change the color temperature (CCT) in the range from 3000K to 6000K, we can adjust the light color depending on our needs and preferences. It has a high IP54 rating, making it ideal for use in rooms with high humidity. The CCT function allows you to changes to the colour temperature of light (3000/4000/6000K). Narrow beam angle 30° gives directional light so that selected surfaces can be better exposed. Designed for surface mounting.

CCT


IP54

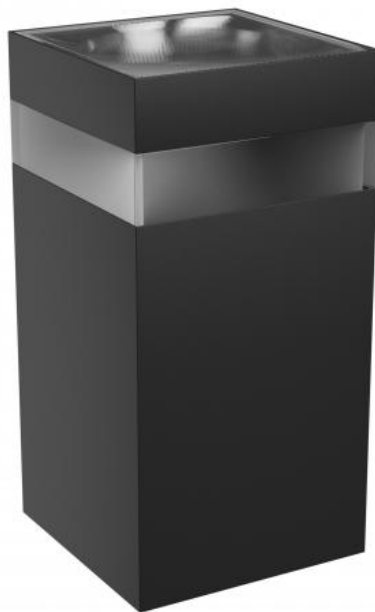

|                           |                       |                    |                         |
|---------------------------|-----------------------|--------------------|-------------------------|
| Power                     | <b>9 W</b>            | Voltage            | <b>230 V</b>            |
| Luminous flux*            | <b>1000 lm (360°)</b> | Colour temperature | <b>3000/4000/6000 K</b> |
| Colour of light           | <b>CCT</b>            | Beam angle         | <b>30 °</b>             |
| Degree of protection (IP) | <b>IP54</b>           |                    |                         |

## Technical data

|                           |  |
|---------------------------|--|
| Code                      | SLI003027CCT_PW                                    |
| Power                     | 9 W  |
| Nominal current           | 65 mA  |
| Voltage                   | 230 V  |
| Energy consumption        | 9 kWh/1000h  |
| Frequency                 | 50HZ Hz  |
| Protection class          | II   |
| Power factor              | 0,5  |
| Useful luminous flux*     | 1000 lm (360°)                                     |
| Luminous flux**           | 700 lm (360°)                                      |
| Lamp efficacy             | 111 lm/W   |
| Colour temperature        | 3000/4000/6000 K                                   |
| Colour of light           | CCT  |
| Beam angle                | 30 °   |
| RA                        | 80   |
| Light source included     | +  |
| Dimmable                  | No   |
| Working temperature range | -20/+40 °  |
| Lifespan                  | 17000 h  |
| Housing material          | Plastic  |
| Degree of protection (IP) | IP54   |
| Colour                    | Black  |
| Dimension (AxBxC)         | 99x78x156 mm                                       |
| For use                   | Inside/Outside                                     |
| Assembly method           | On the ceiling                                     |
| Application               | INT/EXT  |
| Made in                   | PRC  |
| Other                     | Light color change function<br>3000K/4000K/6000K , |

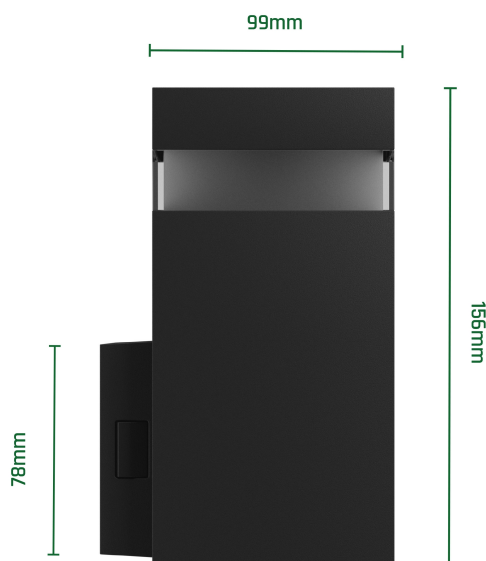

## Related documents

[User manual](#)[Declaration of Conformity](#)[Photometric file](#)

