

AK RPA V2A (563 169)



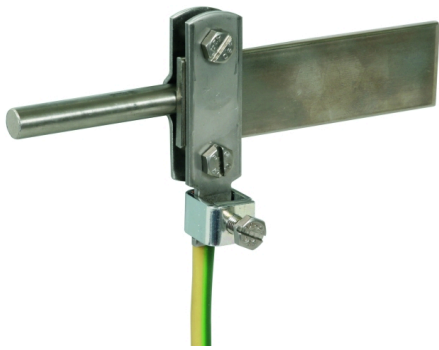


Figure without obligation



Type	AK RPA V2A
Part No.	563 169
Conductor support Rd / Fl	Ø8-10 / 30 x 3 up to 11 mm
Material	StSt
Material (cage clamp)	St/galZn
Terminal cross section	2.5-95 mm ²
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	5.5 kA
Screw	M6 x 16 / 20 mm
Material of screw	StSt
Lightning current carrying capability (10/350 µs)	^{*)}
Standard	EN 62561-1
Weight	76 g
Customs tariff number	85389099
GTIN	4013364104839
PU	50 Stk

^{*)} For exact assignment see test certificate.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.