



CoreLine panel

RC132V G5 36S/840 PSU W60L60 NOC

CoreLine panel, 28.5 W, 600x600 mm, 3600 lm, 4000 K

Philips CoreLine panel Gen5 delivers on the CoreLine promise of innovation, easy installation and excellent illumination. Designed as a direct replacement for functional luminaires in general lighting applications, this LED panel light's innovative MultiLumen feature offers a choice of three lumen packages in a single luminaire. This makes it easy to select the right product, gives you the flexibility respond to customer preferences on site, and means fewer product codes on stock. Installing this CoreLine RC132V LED panel is quick and easy too, thanks to a quick connector or Wieland connector. Interact Ready luminaires with integrated wireless communications are also available in this CoreLine range, ready to be used with Interact gateways, sensors and software.

Product data

General Information		Stroboscopic effect visibility measure (SVM)	
Light source replaceable	No	Light source color	840 neutral white
Number of gear units	1 unit	Optic type	Beam angle 120°
Driver included	Yes	Luminaire light beam spread	120°
Lighting Technology	LED	Unified glare rating CEN	22
Value ladder	Performance	Total harmonic distortion	20 %
Light Technical		Operating and Electrical	
Luminous Flux	3,600 lm	Input Voltage	220-240 V
Luminous Efficacy (rated) (Nom)	125 lm/W	Line Frequency	50 or 60 Hz
Saturated Red (R9)	<50	Inrush current	16 A
Correlated Color Temperature (Nom)	4000 K	Inrush time	0.2 ms
Color rendering index (CRI)	>80	Power Consumption	28.5 W
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1	Power Factor (Fraction)	0.9
		Connection	Push-in connector 3-pole

CoreLine panel

Cable	-
Number of products on MCB of 16 A type B	21

Temperature

Ambient temperature range	-10 to +40 °C
---------------------------	---------------

Controls and Dimming

Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Control interface	-
Constant light output	No

Mechanical and Housing

Housing Material	Steel
Reflector material	Acrylate
Optic material	Polystyrene
Optical cover material	Acrylate
Fixation material	-
Housing Color	White
Optical cover finish	Opal
Overall length	595 mm
Overall width	595 mm
Overall height	61 mm
Dimensions (Height x Width x Depth)	61 x 595 x 595 mm

Approval and Application

Ingress protection code	IP20/44 [Finger-protected; wire-protected, splash-proof]
Mech. impact protection code	IK03 [0.3 J]
Sustainability rating	-
Protection class IEC	Safety class II
Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	For mounting on normally flammable surfaces
CE mark	Yes
ENEC mark	ENEC mark
Warranty period	5 years

Photobiological risk	Photobiological risk group 0 @200mm to EN62778
----------------------	--

Photobiological risk specification	0.2 m
------------------------------------	-------

EU RoHS compliant	Yes
-------------------	-----

Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Initial chromaticity	(0.38, 0.38) SDCM≤3
Power consumption tolerance	+/-10%
Standard Deviation of Colour Matching (McAdam ellipse)	SDCM≤3

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L90
Lumen maintenance at median useful life* 100000 h	L80


Application Conditions

Performance ambient temperature Tq	25 °C
Suitable for random switching	Yes

Product Data

Order product name	RC132V G5 36S/840 PSU W60L60 NOC
Full product name	RC132V G5 36S/840 PSU W60L60 NOC
Full product code	871951495000900
Order code	911401840684
Material Nr. (12NC)	911401840684
Numerator - Quantity Per Pack	1
Net Weight (Piece)	1.900 kg
EAN/UPC - Product/Case	8719514950009
Numerator - Packs per outer box	1
EAN/UPC - Case	8719514950009

Dimensional drawing

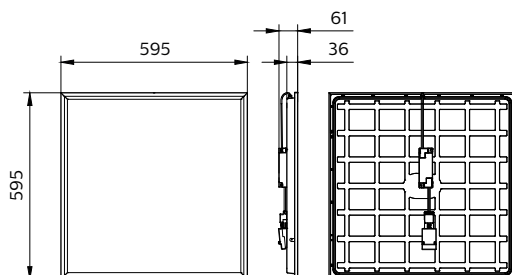

CoreLine panel

