PHILIPS Lighting



CorePro GLASS LED candles and lusters

CorePro LEDCandleND6.5-60WB35 E14 840FRG

Featuring a classic heritage design, these filament LED candle combines the familiar shapes of classic incandescent bulbs with the benefits of long-lasting LED technology. The LED candle bulb, a very easy choice for people who are looking for a retrofit LED replacement, the LED candle provides 90% energy savings compared with conventional lamps. CorePro Glass LED bulbs provide excellent quality of light for stairway lighting. The LED candle bulb offers a lifetime of 15,000 hours to reduce maintenance costs.

Product data

General Information			
Cap-Base	E14 [E14]		
Nominal lifetime	15,000 hour(s)		
Switching Cycle	20,000		
Lighting Technology	LED		
Flux measurement reference	Sphere		
Light Technical			
Color Code	840 [CCT of 4000K]		
Luminous Flux	806 lumen		
Color Designation	Cool White (CW)		
Correlated Color Temperature (Nom)	4000 K		
Luminous Efficacy (rated) (Nom)	124.00 lm/W		
Color Consistency	<6		
Color rendering index (CRI)	80		
LLMF At End Of Nominal Lifetime (Nom) 70 %			


Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	6.5 W
Lamp Current (Nom)	50 mA
Wattage Equivalent	60 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.55
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	55 °C
Controls and Dimming	
Dimmable	No

CorePro GLASS LED candles and lusters

Mechanical and Housing	
Bulb Finish	Frosted
Bulb Shape	B35 [B 35mm]
Approval and Application	
Energy Consumption kWh/1000 h	7 kWh
EPREL Registration Number	387,444
CE mark	Yes
EU RoHS compliant	Yes
Product Data	
Full product code	871951434752600

Order product name	CorePro LEDCandleND6.5-60WB35 E14	
	840FRG	
Order code	929002028392	
Numerator - Quantity Per Pack	1	
Numerator - Packs per outer box	10	
Material number (12NC)	929002028392	
Full product name	CorePro LEDCandleND6.5-60WB35 E14	
	840FRG	
EAN/UPC - Case	8719514347533	

Dimensional drawing




Photometric data

1 x 9290028283 835 4008K 6.5W			
		1	a 1956 ben.
Personal Auto	Quertto attinación degram	USR-diagram	
XX	Advances 110 Fig. 140		5.e.
KAZY	- Internet - Internet	- 1 T T	
HEARE			
KXXX			
XX			_
	Diffusion laser salar	Lanimour Table	
Manager 14	Manual Roberts and American Street	2 2 2 2 2 2 2 2	-
MARK AND A			8
2014/08/12/1 2		EE 33333	
		- FRISSE	

Philips Lighting B.V.


Product	D	с
CorePro LEDCandleND6.5-60WB35 E14 840FRG	35 mm	97 mm



Spectral Power Distribution Colour - CorePro LEDCandleND6.5-60WB35 E14 840FRG


CorePro GLASS LED candles and lusters

Photometric data



Light Distribution Diagram - CorePro LEDCandleND6.5-60WB35 E14 840FRG

Lifetime

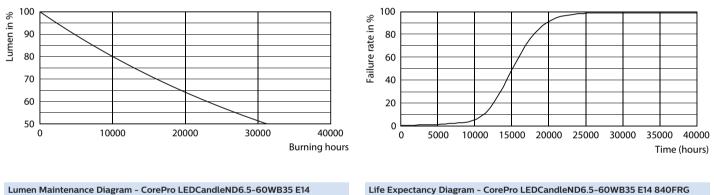

Lumen Maintenance Diagram - CorePro LEDCandleND6.5-60WB35 E14 840FRG



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, May 16 - data subject to change