

## EKV5+0 35 G V76D5TH (V76D5TH)

- Anti-rotation crimped cable lugs (type PK1)
- Earthing and short-circuiting devices can be configured online via the earthing and short-circuiting configurator

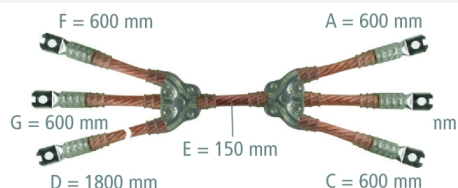


Figure without obligation

Type	EKV5+0 35 G V76D5TH
Part No.	V76D5TH
Version	Five-pole
Cable cross-section (phase side)	35 mm <sup>2</sup>
Cable cross-section (earth side)	35 mm <sup>2</sup>
Length of phase cable A	600 mm
Length of phase cable B	600 mm
Length of phase cable C	600 mm
Length of phase cable F	600 mm
Length of phase cable G	600 mm
Length of earthing cable	1800 mm
Cable cross-section	35 mm <sup>2</sup>
Fully insulated	No
Max. short-circuit current I <sub>k</sub> 0.5 s	10.0 kA
Max. short-circuit current I <sub>k</sub> 1 s	6.9 kA
Crimped cable lug	PK1
Standard	EN/IEC 61138 (DIN VDE 0283-3) and EN/IEC 61230 (DIN VDE 0683-100)
Temperature range	-25 °C ... +55 °C
Material (cable)	E-Cu, extra finely stranded and highly flexible
Material (sheath)	Thermoplastic polymer (flexible PVC compound YM2)
Hole (cable lug)	Ø12.5 mm
Weight	10 kg
Customs tariff number	85359000
GTIN	4013364164178
PU	1 Stk

**Attention: Please state the relevant Variant No. when ordering.**

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.