


## PHE 15 16.7 BEL STK (767 413)

- Easy transport due to detachable insulating stick
- Pluggable end fitting with eye allows to easily and safely climb the mast

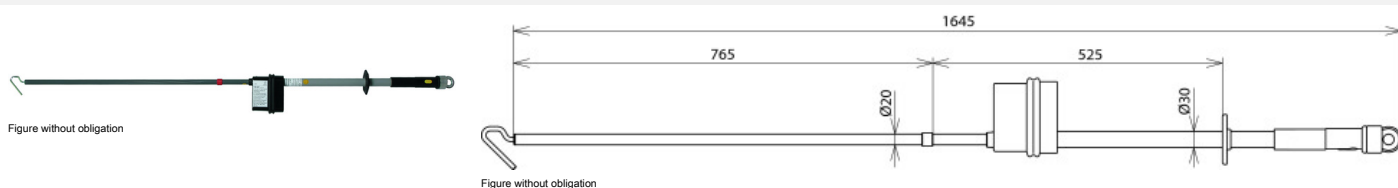

For traction power lines

Hook-shaped electrode and end fitting with plug-in coupling and non-slip eye included

Type	PHE 15 16.7 BEL STK
Part No.	767 413
Nominal voltage (U <sub>N</sub> )	15 kV
Type of voltage	a.c.
Frequency	16.7 Hz
Total length (l <sub>o</sub> )	1645 mm
Insertion depth (l <sub>i</sub> )	765 mm
Insulating clearance (l <sub>i</sub> )	525 mm
Length (test prod)	992 mm
Length of the operating stick (with hand guard)	638 mm
Standard	EN/IEC 61243-1 (DIN VDE 0682-411)
Temperature range	-25 °C ... +55 °C, climatic category N
Design	Complete
For use at	☀
For	Outdoor installations
Application	Overhead contact lines of electric railways
Design	Single-pole
Indication	Visual
Self-testing element	Yes
Material (test prod)	Glass-fibre reinforced epoxy resin tube
Material (test electrode)	Copper alloy/gal Sn
Material (indicator)	Plastic, fully insulated
Material (insulating stick)	Glass-fibre reinforced polyester tube
DB drawing No.	3 Ebgw 02.55
DB material No.	964 851
Weight	1,77 kg
Customs tariff number	90303370
GTIN	4013364128750
PU	1 Stk

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.