

### MAMVK 8.16 15.25 STBL (308 040)


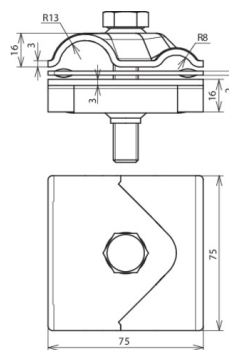


Figure without obligation

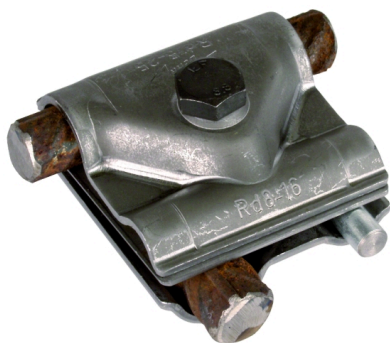

Arrangement:

Type	MAMVK 8.16 15.25 STBL
Part No.	308 040
Material of clamp	St/bare
Clamping range Rd	8-16 / 15-25 mm
Material thickness	3.0 / 2.0 mm
Screw	M12 x 65 mm
Material of screw	St/bare
Lightning current carrying capability (10/350 µs)	100 kA <sup>*)</sup>
Standard	EN 62561-1
Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C)	10.2 kA
Approvals	UL 467
Weight	450 g
Customs tariff number	85389099
GTIN	4013364055902
PU	20 Stk

<sup>\*)</sup> For exact assignment see test certificate.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.