


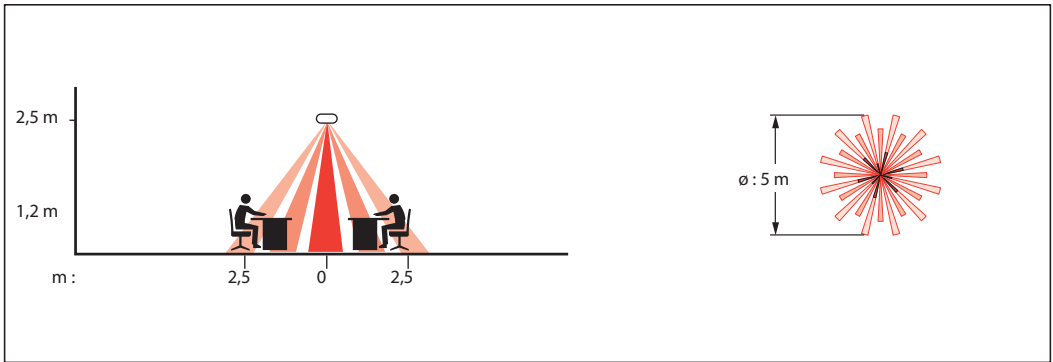
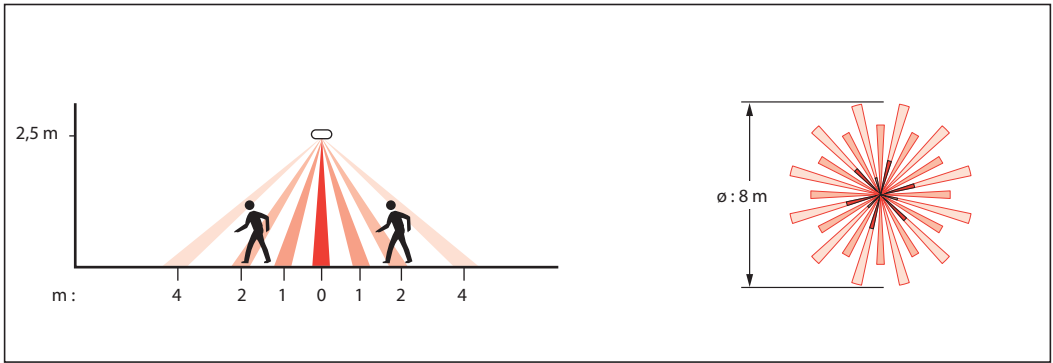
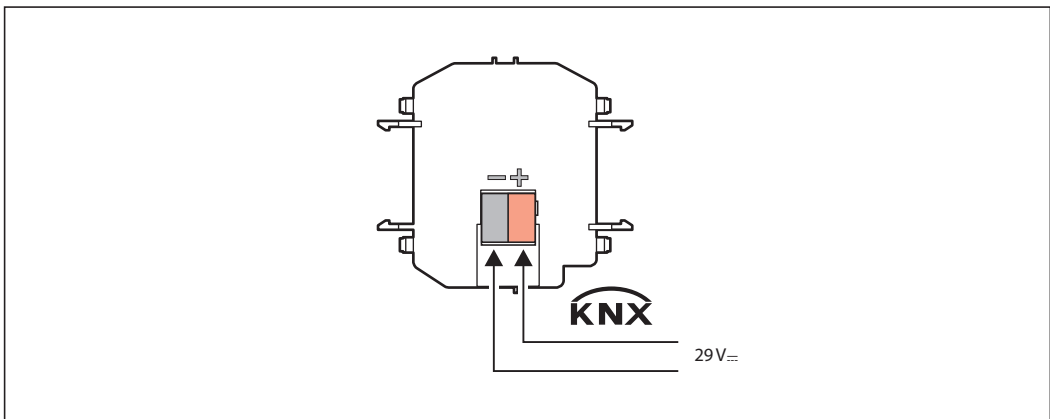
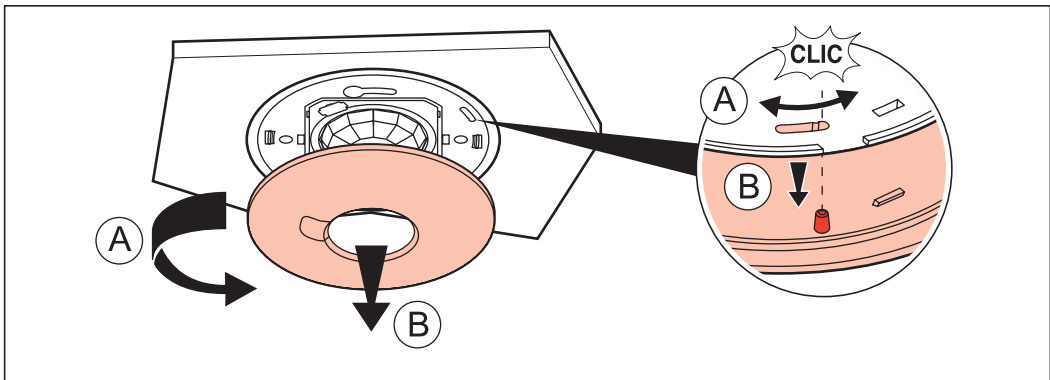



	29V <sub>~</sub>
	16 mA
	4 x (Ø 0,6 mm < $\frac{8 \text{ mm}}{\text{pitch}}$ < Ø 0,8 mm)
	-5°C → +45°C
	PIR
	500 lux
	15 mn
	Auto ON/OFF
	Ø 8 m

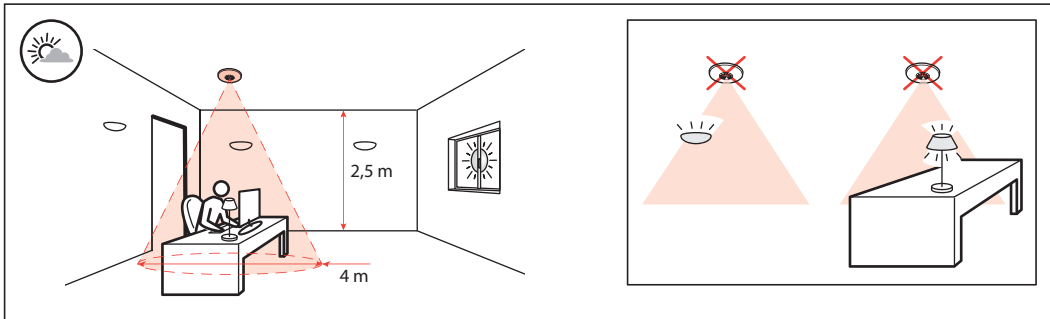


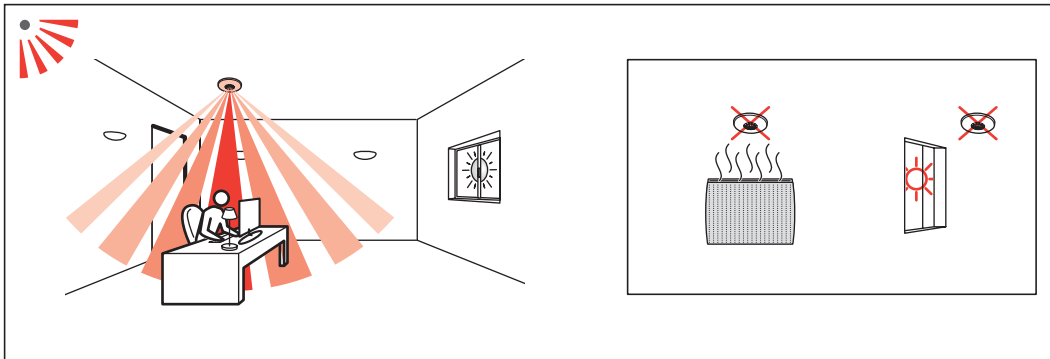





1






2

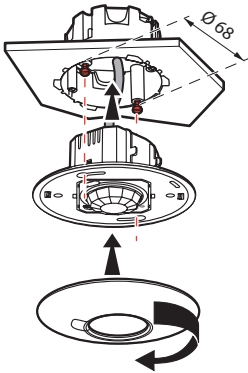

1



2

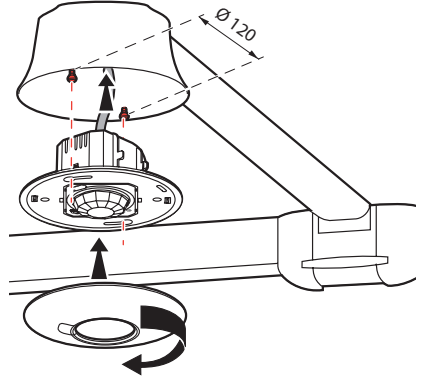

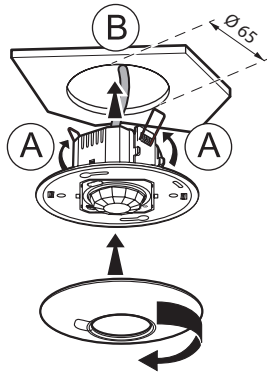


Auto ON/OFF





## Manual ON / Auto OFF

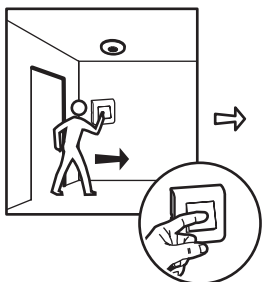

- À la première utilisation: Télécharger l'application Legrand Close Up sur l' Apple Store ou le Play Store.
- On first use: Download the Legrand Close Up app from Apple Store or Play Store
- Al primo utilizzo: Scaricare l'app Legrand Close Up su Apple Store o Play Store.

- Réf. 0 882 40 : Passerelle de configuration
- Cat. No(s) 0 882 40 : Configuration tool
- Ref. 0 882 40: Gateway di configurazione



&



Application: «Legrand Close Up»



App Store



Google Play




- Pour plus de renseignement sur les paramètres, reportez vous à la fiche technique de la passerelle de configuration Réf. 0 882 40.
- For more information about setting parameters, refer to the data sheet for the configuration gateway Cat. No. 0 882 40.
- Per maggiori informazioni sulle impostazioni, consultare la scheda tecnica del gateway di configurazione Ref. 0 882 40.

	5 - 1275 lux
	5 sec - 17 h 59 min 59 sec
	25% - 50% - 75% - 100%
Mode	Auto ON/OFF - Manual On/Auto OFF - Walk-through

- LED d'émission/ de réception IR
- IR reception/ transmission LED
- LED ricezione/ trasmissione IR

- LED de détection
- Presence LED
- LED rilevazione presenza

- Capteur PIR
- PIR sensor
- Sensore PIR



- Bouton de prog. KNX
- KNX prog. push-button
- Pulsante prog. KNX

- LED KNX
- KNX LED
- LED KNX

- Cellule de luminosité
- Daylight sensor
- Cellula di luminosità

- Cache de protection
- Protection
- Protezione