

KS 8.10 FL30 STTZN (318 201)





Figure without obligation

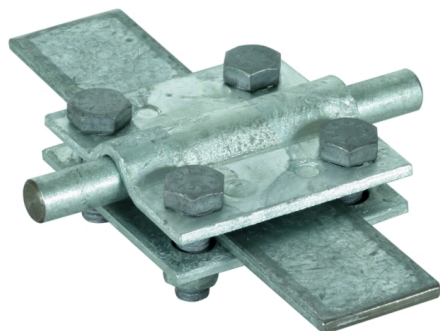

Arrangement:

| Type | KS 8.10 FL30 STTZN |
|---|----------------------|
| Part No. | 318 201 |
| Material of clamp | St/tZn |
| Clamping range Rd / Fl | 8-10 / 30 mm |
| Clamping range Fl / Fl | 30 / 30 mm |
| Screw | M8 x 25 mm |
| Material of screw / nut | St/tZn |
| Dimensions | 60 x 60 x 3 mm |
| Lightning current carrying capability (10/350 µs) | 100 kA ^{*)} |
| Standard | EN 62561-1 |
| Short-circuit current (AC 50 Hz / DC) (1 s; ≤ 300 °C) | 14 kA |
| Zinc coating acc. EN 1461 | ~50 µm |
| Weight | 234 g |
| Customs tariff number | 85389099 |
| GTIN | 4013364021464 |
| PU | 25 Stk |

^{*)} See test certificate for exact classification.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.