





MASTER UltraEfficient LED bulb

MAS LEDBulbND5.2-75W E27 840 A60 FR G UE

This is the most efficient LED bulb from Philips brand. 210lm/W helps to concrete the company statement of sustainability. 50000 hour lifetime helps to extend the replacement cycle to reduce the waste. This is not only the high SPEC product, but also keep the light quality of Philips brand

Product data

General Information		
Cap-Base	E27	
Nominal lifetime	50,000 hour(s)	
Switching Cycle	50,000	
Lighting Technology	LED	
Flux measurement reference	Sphere	
Light Technical		
Color Code	840 [CCT of 4000K]	
Beam Angle (Nom)	300 degree(s)	
Luminous Flux	1,095 lm	
Color Designation	Cool White (CW)	
Correlated Color Temperature (Nom)	4000 K	
Luminous Efficacy (rated) (Nom)	210 lm/W	
Color Consistency	<6	
Color rendering index (CRI)	80	
LLMF At End Of Nominal Lifetime (Nom)	70 %	


Photobiological safety according to EN 62471	RG1
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	5.2 W
Lamp Current (Nom)	60 mA
Wattage Equivalent	75 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.4
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	70 °C

MASTER UltraEfficient LED bulb


Controls and Dimming		
Dimmable	No	
Mechanical and Housing		
Bulb Finish	Frosted	
Bulb Material	Glass	
Bulb Shape	A60	
Net Weight (Piece)	0.035 kg	
Approval and Application		
Energy Efficiency Class	A	
Energy Consumption kWh/1000 h	6 kWh	
EPREL Registration Number	1442623	
Photobiological risk	Photobiological risk group 1 @ 200mm to	
	EN62471	
EU RoHS compliant	Yes	
EyeComfort	Yes	
Flickering value (PstLM) - Flickering value as	1	
per EN 61000-3-3		
Stroboscopic effect visibility measure (SVM)	0.4	

-20 to +45 ℃	
No	
MAS LEDBulbND5.2-75W E27 840 A60	
FR G UE	
MAS LEDBulbND5.2-75W E27 840 A60	
FR G UE	
872016918873000	
929003624902	
929003624902	
1	
8720169188730	
10	
8720169188747	

Dimensional drawing



Product	D	с
MAS LEDBulbND5.2-75W E27 840 A60 FR G UE	60 mm	104 mm



Light Distribution Diagram - MAS LEDBulbND5.2-75W E27 840 A60 FR G UE


Photometric data

	1 x 9290034349 5.2W
	1 a 1099 in
Appropriate 14 Designation 12 Designation 12 Design	

General uniform lighting - MAS LEDBulbND5.2-75W E27 840 A60 FR G UE


MASTER UltraEfficient LED bulb

Photometric data

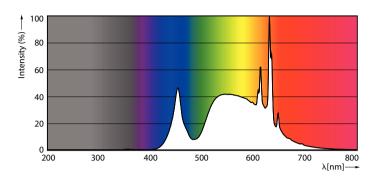

Spectral Power Distribution Colour - MAS LEDBulbND5.2-75W E27 840 A60 FR G UE

Lifetime

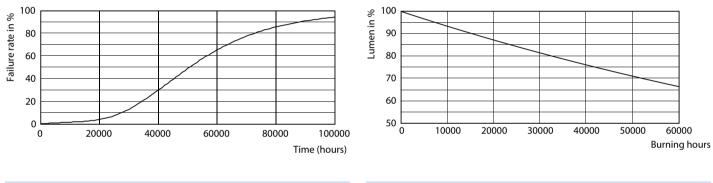

Life Expectancy Diagram

Lumen Maintenance Diagram - MAS LEDBulbND5.2-75W E27 840 A60 FR G UE



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2025, March 17 - data subject to change