

WLD+40034_DALI

WLD+40034_DALI




Power **5 W**
Colour temperature **3000 K**
Beam angle **165 °**
Degree of protection (IP) **IP20**

Voltage **48 V**
Colour of light **WW**
UGR **<19**


Technical data

Code	WLD+40034_DALI
Power	5 W
Nominal current	100 mA
Voltage	48 V
Energy consumption	5 kWh/1000h
Frequency	DC Hz
Protection class	III
Manufacturer of power supply	tuobo
Power factor	1
Useful luminous flux*	550 lm (360°)
Luminous flux**	435 lm (360°)
Lamp efficacy	110 lm/W
Luminous intensity	90 cd
Colour temperature	3000 K
Colour of light	WW
Beam angle	165 °
UGR	<19
RA	>90
Light source included	Yes
Producer of LED diodes	osram
Uniformity of color SDCM max	5
Dimmable	DALI
Working temperature range	-20 to +40 °
Lifespan	50000 h
Housing material	AL+PC
Degree of protection (IP)	IP20
Colour	White/Black
Dimension (AxBxC)	100 (850mm wire) mm
For use	Inside
Assembly method	NA SZYŃE
Application	Inside
Made in	PRC
Other	DALI ,

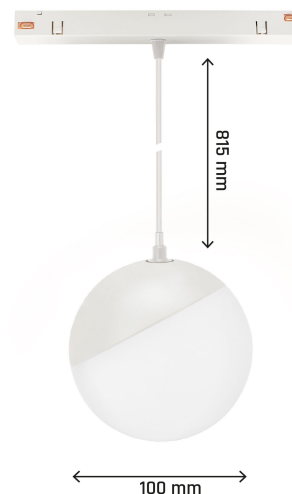

Related documents



 Declaration of Conformity

