


PRODUCT DATASHEET

M 580 N 72 LB -SF-F7-0.3M

PV PANELS N-TYPE BIFACIAL SILVER | TopCon bifacial photovoltaic panels with silver frame

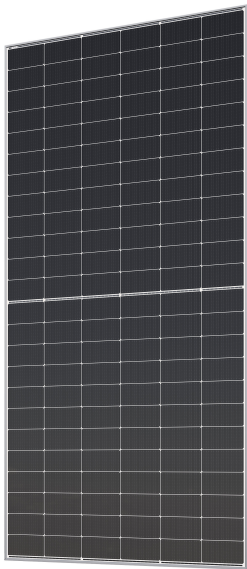

Areas of application

- Utility installations
- Commercial and industrial installations
- Residential installations

Product benefits

- TopCon technology provides higher efficiency due to better sunlight conversion than standard panels
- Glass-glass modules offer improved protection against moisture, mechanical loads and fire protection
- 25-years of product guarantee, 30-years of linear power output guarantee
- Limited PID-effect (potential induced degradation) thanks to strict quality control in production process
- Very low yearly degradation of the cells thanks to the better resistance to high temperatures
- Durable design and highest production standards guarantees operational reliability and quality

Product features

- Bifacial - both sides of the panel are absorbing the light
- Original Stäubli MC4 EVO 2 connectors
- Available in a long cable version
- Frame made of anodized aluminum alloy
- Multi-bus bar (MBB) technology
- Maximum static load up to 5400 Pa

TECHNICAL DATA

ELECTRICAL DATA STC

Maximum Power Pmax (STC)	580 W
Maximum Power Current Imp (STC)	13.62 A
Short Circuit Current Isc (STC)	14.36 A
Maximum Power Voltage Vmp (STC)	42.59 V
Open Circuit Voltage Voc (STC)	51.48 V
Module efficiency factor (STC)	22,45 %

ELECTRICAL DATA NMOT

Maximum Power Pmax (NMOT)	437 W
Maximum Power Current Imp (NMOT)	10.97 A
Short Circuit Current Isc (NMOT)	11.59 A
Maximum Power Voltage Vmp (NMOT)	39.84 V
Open Circuit Voltage Voc (NMOT)	48.89 V

ELECTRICAL DATA STC and NMOT

Power tolerance	3 %
-----------------	-----

MECHANICAL DATA

Type of Faciality	Bifacial
Cell material	Mono crystalline
Number of cells	144
Number of bypass diodes	3
With frame	Yes
Type of connection	Staubli MC4 EVO2
Width	1134 mm
Length	2278 mm
Height	30 mm
Product weight	31200.000 g
Cable length	0.3 m
Glass with anti-reflection coating	Yes
Colour cells	Dark blue
Colour frame	Silver
Front Glass	Yes

TEMPERATURE RATINGS

Nominal operating cell temperature	45 °C
Temperature coefficient Isc	0.046 %/K
Temperature coefficient Pmpp	-0.300 %/K

Temperature coefficient Uoc	-0.250 %/K
-----------------------------	------------



OPERATING CONDITIONS

Maximum series fuse rating	30 A
Temperature range in operation	-40...+85 °C
Front Side Maximum Static Loading	5400 Pa
Rear Side Maximum Static Loading	2400 Pa
Reverse current load	30 A

EQUIPMENT / ACCESSORIES

- Product is delivered as a whole, no assembly required from customer
 - MC4 EVO 2 connectors are fitted to the panel
 - 3 bypass diodes are already installed in the panel
-

DOWNLOAD DATA

Documents and certificates	Document name
 User instruction / safety instructions	PV MODULE
 Declarations of conformity	CE Certificate PV Panels

References / Links

- For Guarantee see www.ledvance.com/guarantee
-

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.