


# Turlock



- High performance inground uplight suitable for commercial, hospitality and residential applications
- Static load test to 2000kg
- Supplied c/w installation housing for additional protection and ease of installation
- Die-cast aluminium construction with 316L stainless steel top frame
- Pre-wired with 1 metre of rubber insulated cable
- Triac dimmable as standard
- Powered by HEP

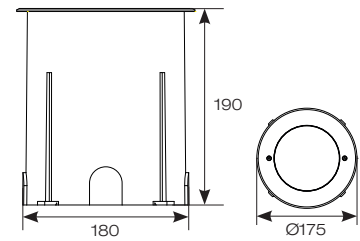

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
230V	50/60Hz	-20 to 25°C	L70 50,000	Ra 80	3	20°	1	IP67	IK10

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	TRADE
<b>ATURWOLED/175</b>	Cool White	8W	4000K	884lm	110lm	<b>£214.00</b>
<b>ATURWOLED/175/WW</b>	Warm White	8W	3000K	785lm	98lm	<b>£214.00</b>