

# Product Data Sheet

## GW76901

GW FIT Range




Systems of accessories for electrical installations used for residential, tertiary and industrial applications. The system consists of fasteners for pipes and cables, cable fittings, accessories for rigid pipes (RK Series) and flexible conduit (DF Series). The system include also a wide variety of cable ties (52FS Range) and terminal blocks (44 Range).

|                          |                      |                      |  |
|--------------------------|----------------------|----------------------|--|
| IP degree                | IP68 (at 10 bar)     | Material             | Nickel-plated brass  |
| For cables Ø (mm)        | from 3 to 6.5        | Description          | Cable gland  |
| Type of pitch            | PG7                  | Mounting hole Ø (mm) | 12.5   |
| Area                     | 1 (G) - 20 (D)       | Electrocod           | 230  |
| Ambient temperature      | -60 °C ≤ Ta ≤ +95 °C | Standard             | EN 50262 - IEC 62444 - EN 60079-0 - EN60079-7 - EN 60079-31 - EN 60079-7 - EN 60079-31 - DIN 40430 |
| Installation temperature | -20 +95 °C           | ATEX Classification  | 2G 1D Ex e II tD A20 IP68  |


### BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

| Saline solution | Acids        |           | Bases        |           | Solvents  |           |           |               | Mineral oil | UV rays   |
|-----------------|--------------|-----------|--------------|-----------|-----------|-----------|-----------|---------------|-------------|-----------|
|                 | Concentrated | Diluted   | Concentrated | Diluted   | Hexane    | Benzol    | Acetone   | Ethyl alcohol |             |           |
| Resistant       | Resistant    | Resistant | Resistant    | Resistant | Resistant | Resistant | Resistant | Resistant     | Resistant   | Resistant |

### DIMENSIONAL

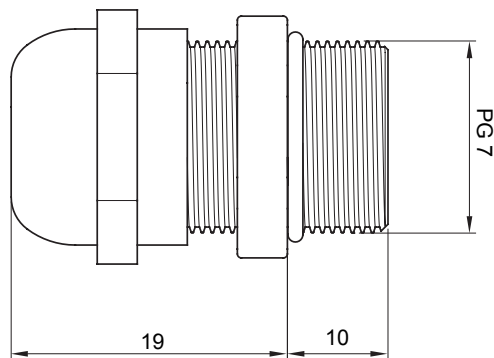

### TECHNICAL SYMBOLOGY



### STANDARDS/APPROVALS

