


Make up the room / do not disturb



Use

Lampholder with double optical signalling: "do not disturb" and "rearrange the room".


Range

Designation	Item
Lampholder with double signalling	<input type="checkbox"/> RW4373H
	<input type="checkbox"/> RA4373H
	<input type="checkbox"/> RG4373H

Color code:

White colour Aluminum colour Black colour

Overall dimensions (mm)

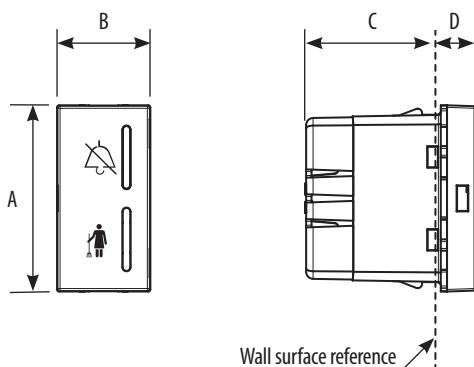

	A	B	C	D
..4373H	45.1	22.5	31.2	9.8

Connection

Terminal type: screw clamp
 Terminal capacity: 2 x 1,5 mm² max
 Stripping length: 8 mm
 Screwdriver: flat 3
 Compatible with flexible or rigid cables

Technical characteristics

- **Protection index**
 (considering a complete installation, including cover plate)
 Penetration by solid bodies/liquid: IP40
- **Mechanical characteristics**
 Impact test: IK 04
- **Material characteristics**
 Material:
 Case and Key cover: PC (Polycarbonate)
 Halogen free.
 UV resistant.
- Self-extinguishing:
 850° C / 30 s for insulating parts holding live parts in place
 650° C / 30 s for other parts made of insulating materials
- **Electrical characteristics**
 Voltage: 230V a.c.
 Power consumption : 2 x 1W
- **Climatic characteristics**
 Storage temperature: - 10° C to + 70° C
 Use temperature: - 5° C to + 35° C

Cleaning

Clean the surface with a cloth.
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.
Caution: Always test before using special cleaning products.

Standards and approvals

Compliance with standards IEC/EN 60598-2-2
 Refer to e.catalogue.