


# GSUN 4

671793.002.2 | Luminaires for escape route identification



Wall luminaires  
4051859991298  
L 344, B 144, H 78

Wall (surface)  
white

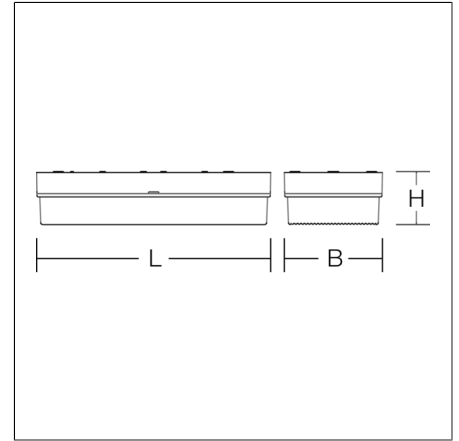

All-plastic luminaires, shockproof. For escape route identification or escape route illumination. Base: plastic (polycarbonate). Refractor: plastic (polycarbonate), transparent, prismatic. 4 legends for escape route identification included. Suitable for Wall (surface). Pendant luminaire also possible with accessories. Suitable for connection to central battery systems.

## Product specifications

Typ of emergency lighting	Central battery system
Monitoring	Power circuit
Battery	without
Operating mode	maintained power mode
Viewing Distance	25 m
Length L	344 mm
Width B	144 mm
Height H	78 mm
Weight	0.84 kg
Light source	LED
Colour temperature	6500 K
System power, mains operation	6 W
System power, emergency operation	6 W
Colour rendering index (CRI)	80
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
Luminaires on B10A fuse	17
Luminaires on B16A fuse	27
Luminaires on C10A fuse	28
Luminaires on C16A fuse	45
Inrush current / Inrush current duration	27 A / 250 $\mu$ s
Type of protection	IP 54
Protection class	II
Ambient temperature for maintained power	-10 °C ... + 35 °C
Ambient temperature for non-maintained power mode	-10 °C ... + 35 °C
Conformity mark	CE

## Accessories



981167.002  
Ball impact guard