


Unity 100 Wallwash



- Recessed adjustable architectural wallwash with 355° rotation suitable for commercial, hospitality and retail applications
- Adjustable tilt angle from -15° to 45°
- 30° cut-off angle in the horizontal position
- Die-cast aluminium body and heatsink for good thermal management
- Remote driver with plug and play connection
- Dimmable options
- Powered by Tridonic

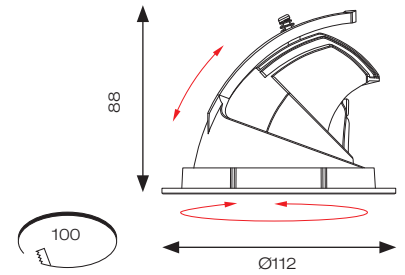

reddot award
winner lighting design



OCTO
Option
Available

Powered by
CASAMBI



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	BEAM ANGLE	CLASS	IP
230V	50/60Hz	-20°C to 25°C	L70 50,000	Ra 90	55°	2	IP20

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	SDCM	UGR	TRADE
AULED100WW	Cool White	15W	4000K	1247lm	84lm	3	17	£67.50
AULED100WW/WW	Warm White	15W	3000K	1097lm	76lm	5	17	£67.50

*UGR Value based on (4H - 8H)

CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (OPTIONS)	DESCRIPTION	TRADE
/OCTO	OCTO Smart Control	+ £155.00	/DD	Digital Dimming (DD1/DD3/DD4)	+ £95.00