


# Product Data Sheet


## GW66683N

IB Range



For walls	Masonry	Glow Wire Test	650 °C
Houseable interloc. socket	1	IP degree	IP55
Mechanical resistance	IK08	Houseable IB socket-outlets	16/32 A SBF / CBF / Automatika
Electrocod	2222	Drilling bottom	Through multidiameter cutter
Minimum installation temperature	-15°C		

### DIMENSIONAL

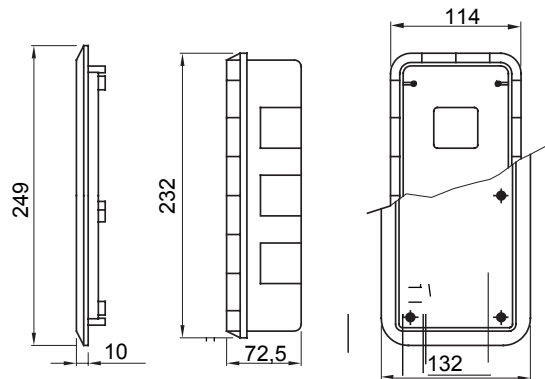

### TECHNICAL SYMBOLOGY

**GWT**

650 °C

**IP**

IP55

**IK**

IK08

### STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com  
sat@gewiss.com  
Last update 20/04/2023

Data, measures, designs and pictures are shown  
only as informative purposes,  
and could be changed without previous notice