

Introduction:

This product is a conversion kit for installing XBT GT2110 in place of XBT G2110. By using this product you can replace the current model with a new model that has smaller panel cutout dimensions.

Package Contents

This unit has been carefully packed, with special attention to quality. However, if for any reason you find any of the contents of this package damaged or missing, please contact your local Schneider-Electric local distributor.

Packing list	For XBT GT2110
Panel Cut Out Adapter x 2	Panel Cut Out Adapter x 1
Gasket x 2	Gasket x 1
M4 Hex nut x 16	M4 Hex nut x 6 (two spares)
Exclusive installation fastener x 4	Exclusive installation fastener x 4

Prerequisites

Before installing XBT GT2110, check that you have all items listed below:

Item	XBT GT2110 Specified Values
Protective Construction	Protection: Equivalent to IP65 or Nema4X (Front face of installed unit)
Weight	0.2 kg (0.44092lb.) or less (Panel Cut Out Adapter only)
External Dimensions	W: 207 mm (8.14959 inch) H: 157 mm (6.18109 inch) D: 17 mm (0.66929 inch)
Color	Silver metallic
Material	Steel plate

Installing the XBT GT2110 unit

Step	Action
1	Check that the XBT GT2110 unit (1) and the moisture resistant gasket (2) are present
2	Make sure the moisture resistant gasket is fitted properly onto the XBT GT2110 unit.
3	Install the gasket (4) to the Panel Cut Out adapter (3) correctly.
4	Attach the XBT GT2110 unit (1) to the Panel Cut Out Adapter prepared in Step 3 by using the installation fasteners (5).
5	Tighten the fastener attachment screws to 0.5 N.m (0.11lb-in.).
6	Insert the attachment prepared in Step 4 into the cutout section of the XBTG2110 operation panel of the target model by matching the threaded portion of the plate with the four corners of the panel.
7	Confirm the gasket is installed correctly.
8	Tighten the M4 hex nuts (6) evenly to 0.5 N.m (0.11lb-in.).


CAUTION

EQUIPMENT DAMAGE HAZARD

- Do not overtighten the fastener attachment screws.
- Do not overtighten the hex nuts.

Failure to follow this instruction can result in injury or equipment damage.

Illustration of XBT GT2110 installation.

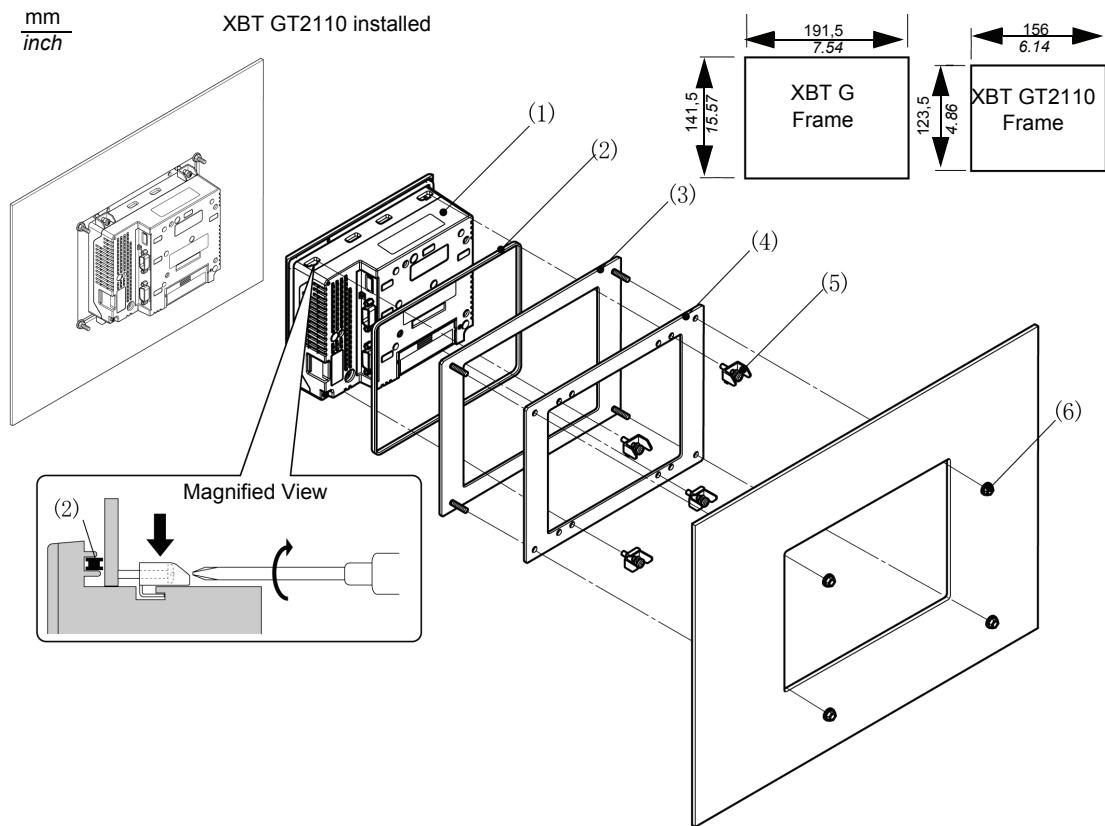

Main unit and accessories in illustration.

Main unit and accessories	Item	Option
XBT GT2110 unit x 1	(1)	Option
Moisture resistant gasket x 1	(2)	Option
Panel Cut Out Adapter x 1	(3)	-
Gasket x 1	(4)	-
Exclusive installation fastener x 4	(5)	Option
M4 Hex nut x 4	(6)	-

000000X .XBTZGCO2-MT02M JM/A Copyright © 06/2008 Schneider Electric

35010381 01

Printed in Japan

06/2008