



OCTO Smart PIR Sensors Powered by Casambi




- Bluetooth enabled surface and recessed smart PIR sensors for use with OCTO Casambi eco-system and suitable for commercial applications
- Compatible with all other bluetooth OCTO Casambi devices as part of the OCTO Casambi ecosystem
- Infrared PIR detector and photocell
- Suitable for residential and commercial applications
- Loop-in, loop-out internal connections for ease of installation
- Detection range strength: 1) Strong detection zone i.e. person moving arm or walking towards PIR
2) Secondary detection zone i.e. person walking perpendicular to PIR



AOCTO/BT/PIR-S

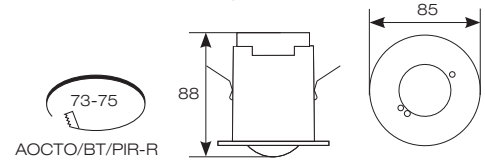

AOCTO/BT/PIR-R



For optimum coverage recommended mounting height: 2.4m to 5m



OCTO
Embedded

Powered by
CASAMBI



Indoor Recessed PIR Sensor
AOCTO/BT/PIR-R



Indoor Surface PIR Sensor
AOCTO/BT/PIR-S

CODE	DESCRIPTION	INPUT	HERTZ	CLASS	IP	TRADE
AOCTO/BT/PIR-R	Smart Recessed PIR Sensor - White	230V	50Hz	2	IP20	£225.00
AOCTO/BT/PIR-S	Smart Surface PIR Sensor - White					£282.00