

# BR/R LED

## PILA LED CLA 40W B35 E14 WW CL ND 1CT/10

Philips BR Dimmable LED Lamps with AirFlux technology provide a soft, diffused level of light and smooth dimming to reduce glare. The sleek, lightweight design is ideal for downlighting.

### Product data

General Information	
Cap-Base	E14 [ E14]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	20000X

Light Technical	
Color Code	827 [ CCT of 2700K]
Beam Angle (Nom)	300 °
Luminous Flux (Nom)	470 lm
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	109.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Nom)	4.3 W
Lamp Current (Nom)	40 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.4 s
Warm Up Time to 60% Light (Nom)	0.4 s

Power Factor (Nom)	0.52
Voltage (Nom)	220-240 V

Temperature	
T-Case Maximum (Nom)	45 °C

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	B35 [ B 35mm]


Approval and Application	
Energy Efficiency Label (EEL)	F
Energy Consumption kWh/1000 h	5 kWh

Product Data	
Full product code	872790096622000
Order product name	PILA LED CLA 40W B35 E14 WW CL ND 1CT/10
EAN/UPC - Product	8727900966220
Order code	929001889731
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10

# BR/R LED

Material Nr. (12NC)	929001889731
Net Weight (Piece)	13.000 g


## Dimensional drawing




Candle B35 4.3-40W 470lm 2700K E14 ND

Product	D	C
PILA LED CLA 40W B35 E14 WW CL ND 1CT/10	35 mm	97 mm


## Photometric data

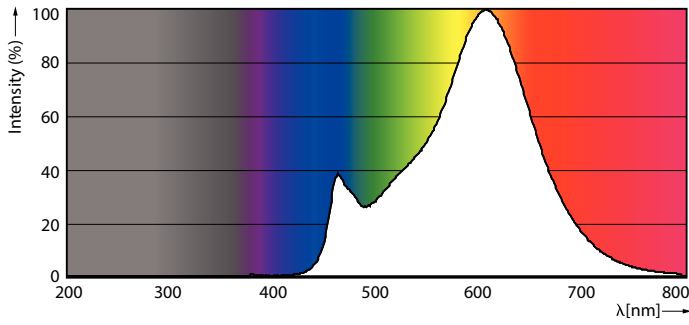

LEDcandle CLA 4.3-40W E14 B35 Clear 827 ND





LEDcandle CLA 4.3-40W E14 B35 Clear 827 ND

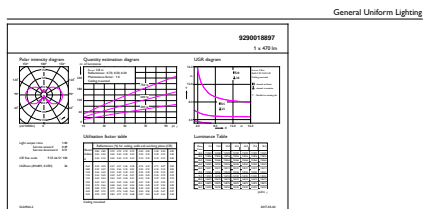

LEDcandle CLA 4.3-40W E14 B35 Clear 827 ND

# BR/R LED

## Lifetime

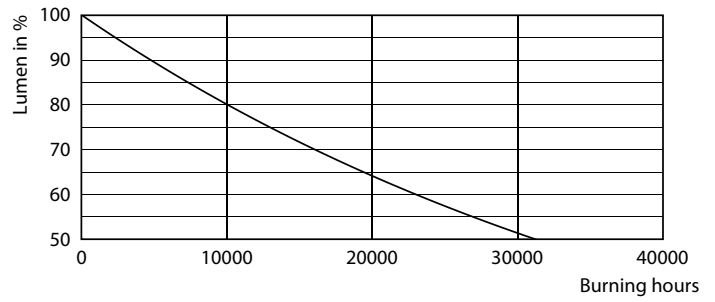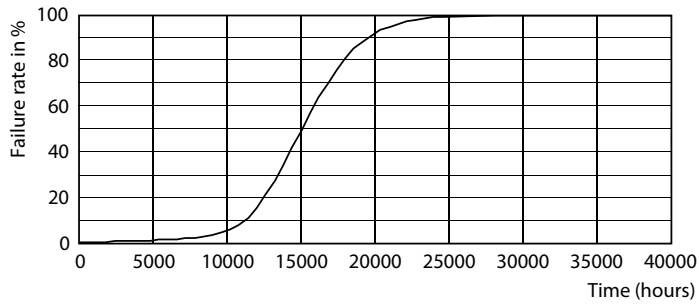

LEDCandle CLA 4.3-40W E14 B35 Clear 827 ND

LEDCandle CLA 4.3-40W E14 B35 Clear 827 ND

