


PRODUCT-DETAILS

AF116-30-11-33

AF116-30-11-33 Contactor

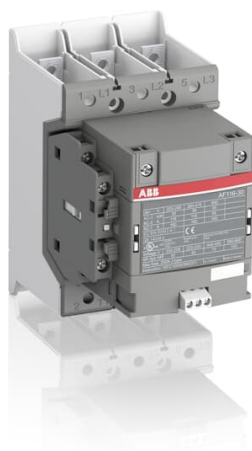

Algemene informatie

Type	AF116-30-11-33
Artikelnummer	1SFL427001R3311
EAN	7320500478516
Omschrijving	AF116-30-11-33 Contactor

Omschrijving	<p>The AF116-30-11-33 is a 3 pole - 690 V IEC or 600 V UL contactor with pre-mounted auxiliary contacts and double clamp, controlling motors up to 55 kW / 400 V AC (AC-3) or 75 hp / 480 V UL and switching power circuits up to 160 A (AC-1) or 160 A UL general use. Thanks to the AF technology, the contactor has a wide control voltage range (100-250 V 50/60 Hz and DC), managing large control voltage variations, reducing panel energy consumptions and ensuring distinct operations in unstable networks. Furthermore, surge protection is built-in, offering a compact solution. AF contactors have a block type design, can be easily extended with add-on auxiliary contact blocks and an additional wide range of accessories.</p>
--------------	--

Ordering

Minimale bestelhoeveelheid	1 stuk
Numerus douanetarief	85364900

Popular Downloads

Gegevensblad, technische informatie	1SBC100192C02
Instructies en handleidingen	1SFC100003M0201
CAD Dimensional Drawing	2CDC001079B0201

Dimensions

Product netto breedte	90 mm
Product netto diepte	142.5 mm
Product netto hoogte	150 mm
Product netto gewicht	1.55 kg

Technical

Aantal hoofdcontacten NO	3
Aantal hoofdcontacten NC	0
Aantal hulpcontacten NO	1
Aantal hulpcontacten NC	1
Nominaal bedrijfsvoltage	Main Circuit 690 V
Toegekende frequentie (f)	Main Circuit 60 Hz
Conventionele vrije-lucht thermische stroom (I_{th})	acc. to IEC 60947-4-1, Open Contactors $\Theta = 40\text{ °C}$ 160 A
Nominale bedrijfsstroom AC-1 (I_e)	(690 V) 40 °C 160 A (690 V) 60 °C 145 A (690 V) 70 °C 130 A
Nominale bedrijfsstroom AC-3 (I_e)	(415 V) 55 °C 116 A (440 V) 55 °C 116 A (500 V) 55 °C 110 A (690 V) 55 °C 65 A (380 / 400 V) 55 °C 116 A (220 / 230 / 240 V) 55 °C 116 A
Nominale bedrijfsstroom AC-3e (I_e)	(415 V) 60 °C 116 A (440 V) 60 °C 116 A (500 V) 60 °C 110 A (690 V) 60 °C 65 A (380 / 400 V) 60 °C 116 A (220 / 230 / 240 V) 60 °C 116 A
Nominale bedrijfsvermogen AC-3 (P_e)	(415 V) 55 kW (440 V) 75 kW (500 V) 75 kW (690 V) 55 kW (380 / 400 V) 55 kW (220 / 230 / 240 V) 30 kW
Nominale bedrijfsvermogen AC-3e (P_e)	(415 V) 55 kW (440 V) 75 kW (500 V) 75 kW (690 V) 55 kW (380 / 400 V) 55 kW (220 / 230 / 240 V) 30 kW
Nominale remcapaciteit AC-3 volgens IEC 60947-4-1	8 x I_e AC-3
Rated Breaking Capacity AC-3e	8.5 x I_e AC-3e

Nominaal inschakelvermogen AC-3 volgens IEC 60947-4-1	10 x Ie AC-3
Rated Making Capacity AC-3e	12 x Ie AC-3e
Beschermende apparaten met kortsluiting	gG Type Fuses 250 A
Nominale kortstondige grensstroom (I_{cw})	at 40 °C Ambient Temp, in Free Air, from a Cold State 10 s 928 A at 40 °C Ambient Temp, in Free Air, from a Cold State 15 min 160 A at 40 °C Ambient Temp, in Free Air, from a Cold State 1 min 379 A at 40 °C Ambient Temp, in Free Air, from a Cold State 1 s 1160 A at 40 °C Ambient Temp, in Free Air, from a Cold State 30 s 536 A
Maximale elektrische schakelfrequentie	(AC-1) 300 omwentelingen per uur (AC-2 / AC-4) 150 omwentelingen per uur (AC-3) 300 omwentelingen per uur
Nominaal isolatievoltage (U_i)	acc. to IEC 60947-4-1 and VDE 0110 (Gr. C) 1000 V acc. to UL/CSA 600 V
Nominale impuls grensvoltage (U_{imp})	8 kV
Mechanische duurzaamheid	5 million
Maximale mechanische schakelfrequentie	300 omwentelingen per uur
Spoel operationele limieten	(acc. to IEC 60947-4-1) U_c (at $\theta \leq 70$ °C)
Nominale stuurstroomkringspanning (U_c)	50 Hz 100 ... 250 V 60 Hz 100 ... 250 V DC Operation 100 ... 250 V
Spoelverbruik	Holding at Max. Rated Control Circuit Voltage 50 Hz 6 V·A Holding at Max. Rated Control Circuit Voltage 60 Hz 6 V·A Pull-in at Max. Rated Control Circuit Voltage 50 Hz 130 V·A Pull-in at Max. Rated Control Circuit Voltage 60 Hz 130 V·A Pull-in at Max. Rated Control Circuit Voltage DC 135 W
Bedieningstijd	Between Coil De-energization and NO Contact Opening 37 ... 47 ms Between Coil Energization and NO Contact Closing 25 ... 55 ms
Beschermingsgraad	acc. to IEC 60529, IEC 60947-1, EN 60529 Auxiliary Terminals IP40
Terminaltype	Double Clamp

Technical UL/CSA

Algemeen gebruik klasse UL/CSA	(600 V AC) 160 A
Paardenkrachtklasse UL/CSA	(200 ... 208 V AC) Three Phase 15 Hp (200 V AC) Three Phase 30 hp (208 V AC) Three Phase 30 hp (220 ... 240 V AC) Three Phase 20 Hp (220 ... 240 V AC) Three Phase 40 hp (440 ... 480 V AC) Three Phase 40 Hp (440 ... 480 V AC) Three Phase 75 hp (550 ... 600 V AC) Three Phase 50 Hp (550 ... 600 V AC) Three Phase 100 hp

Environmental

Omgevingsluchttemperatu ur	Close to Contactor Fitted with Thermal O/L Relay (0.85 ... 1.1 U_c) -25 ... 55 °C Close to Contactor without Thermal O/L Relay (0.85 ... 1.1 U_c) -40 ... 70 °C bij schakelaar voor opslag -40 ... 70 °C
-------------------------------	--

Maximale werkhoogte toegestaan	Without Derating 3000 m
RoHS-status	Following EU Directive 2011/65/EU and Amendment 2015/863 July 22, 2019

Circular Value

ABB EcoSolutions	Yes
Circular Design Principles Recyclability Rate	Design for Closing Resource Loops - Standard EN45555 - 87.8 %
End of Life Instructions	1SFC100112M0001
Group Waste to Landfill Target	Non-hazardous waste is sent to a landfill, where there is no alternative option available within 100km of a facility
Improved Resource Efficiency for Customers	Product Efficiency - Product requires less energy to operate compared to similar product on market or older products from the same line
Sustainable Material Content	Recycled Metal - 37 %

Eco Transparency

Milieuproductverklaring - EPD	1SFC100092D0201
-------------------------------	-----------------

Certificates and Declarations

ABS-certificaat	14-LD1092198-PDA
BV-certificaat	BV_36353_A0BV
CB-certificaat	SEMKO_SE-70479M1
CCS-certificaat	GB14T00030
CQC-certificaat	CQC2013010304604055
Declaration of Conformity - CCC	2020980304001304
Conformiteitsverklaring - CE	2CMT2015-005439
Declaration of Conformity - UKCA	2CMT2020-006118
DNV-certificaat	DNV_E-14043
EAC-certificaat	9AKK107046A8618
LR-certificaat	LR_14_70011(E1)
PRS-certificaat	TE_2092_880423_16
RINA-certificaat	ELE060313XG_002
RMRS-certificaat	9AKK107045A6978
UL-certificaat	20120925-E36588
UL-noteringskaart	UL_E36588

Container Information

Pakketniveau 1 Units	doos 1 stuk
Pakketniveau 1 Breedte	207 mm
Pakketniveau 1 Lengte	216 mm

Pakketniveau 1 Hoogte	150 mm
Pakketniveau 1 Brutogewicht	1.75 kg
Pakketniveau 1 EAN	7320500478516

Classifications

Object classificatiecode	Q
ETIM 4	EC000066 - Magnet contactor, AC-switching
ETIM 5	EC000066 - Magnet contactor, AC-switching
ETIM 6	EC000066 - Magneetschakelaar
ETIM 7	EC000066 - Power contactor, AC switching
ETIM 8	EC000066 - Magneetschakelaar
eClass	V11.0 : 27371003
UNSPSC	39121529
IGCC (IDEA granulaire categoriecodel)	4758 >> Iec Contactors
E-Number (Finland)	3707484
E-Number (Sweden)	3210527

Categorieën

Laagspanningsproducten en -systemen → Control Producten → Magneetschakelaars → Magneetschakelaars

