



# MASTER - LED HID SON-T



## MAS LED SON-T IF 5.4Klm 34W 727 E27

Philips MASTER - LED HID SON-T lamps are an easy LED solution with a short payback period to replace High-Intensity Discharge (HID) and High-Pressure Sodium (SON) lamps. MASTER – LED HID SON-T solutions bring the energy efficiency and long lifetime benefits of LED to HID replacement, providing instant savings for a low initial investment. With the right lamp size and light distribution, you can easily retrofit MASTER – LED HID SON-T lamps into existing SON and SON-T systems, enhancing the lighting quality with LED without changing the luminaire’s ballast (for IF replacements) or reflector.

### Warnings and Safety

- Please refer to the installation guide or consult a Philips Lighting representative for the wiring diagram and instructions.

### Product data

General Information	
Cap-Base	E27
Nominal lifetime	70,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Sphere
Light Technical	
Color Code	727 [CCT of 2700K]
Luminous Flux	5,400 lm
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	158 lm/W
Color Consistency	<6

Color rendering index (CRI)	70
LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG1
Operating and Electrical	
Line Frequency	50 Hz
Input Frequency	50 Hz
Power Consumption	34 W
Lamp Current (Nom)	965 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	-
Voltage (Nom)	68-78 V
Ballast Compatibility	EM

# MASTER - LED HID SON-T

Inrush current at mains	-
Max. lamp no. on MCB B type 10A - Mains	-
Max. lamp no. on MCB B type 10A – EM ballast without Compensation Capacitor.	7
Max. lamp no. on MCB B type 10A – EM ballast with Compensation Capacitor.	8
Max. lamp no. on MCB B type 16A - Mains	-
Max. lamp no. on MCB B type 16A – EM ballast without Compensation Capacitor.	11
Max. lamp no. on MCB B type 16A – EM ballast with Compensation Capacitor.	13

## Temperature

T-Case Maximum (Nom)	59 °C
----------------------	-------

## Controls and Dimming

Dimmable	No
----------	----

## Mechanical and Housing

Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	T60
Net Weight (Piece)	0.250 kg


## Approval and Application

Energy Efficiency Class	D
Energy Consumption kWh/1000 h	34 kWh
EPREL Registration Number	1077801
CE mark	Yes
EU RoHS compliant	Yes
Ambient temperature range	-30 to +45 °C

## Product Data

Order product name	MAS LED SON-T IF 5.4Klm 34W 727 E27
Full product name	MAS LED SON-T IF 5.4Klm 34W 727 E27
Full product code	871951444891900
Order code	929003467212
Material Nr. (12NC)	929003467212
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514448919
Numerator - Packs per outer box	6
EAN/UPC - Case	8719514448926


## Dimensional drawing




Product	D	C
MAS LED SON-T IF 5.4Klm 34W 727 E27	61 mm	200 mm

# MASTER - LED HID SON-T


## Photometric data

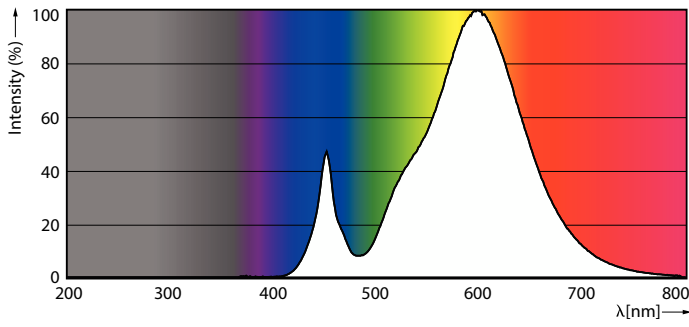

Spectral Power Distribution Colour - MAS LED SON-T IF 5.4Klm 34W 727 E27

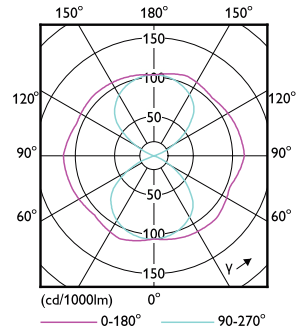


Light Distribution Diagram - MAS LED SON-T IF 5.4Klm 34W 727 E27




General uniform lighting - MAS LED SON-T IF 5.4Klm 34W 727 E27

## Lifetime

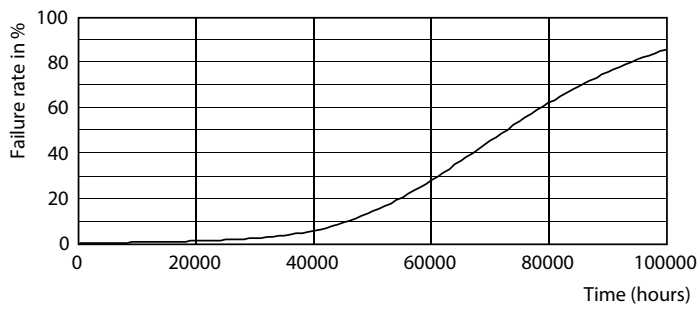

Life Expectancy Diagram

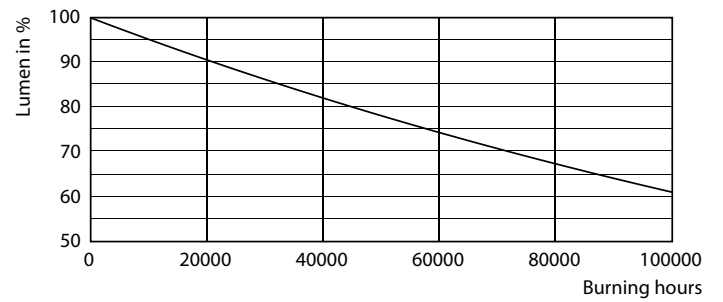

Lumen Maintenance Diagram - MAS LED SON-T IF 5.4Klm 34W 727 E27

## MASTER - LED HID SON-T

