


22260619	<b>DATA SHEET</b>	
Valid from: 09.11.2018	<b>AB-B8-8-L-M23</b>	

### Description

S/A box, with LED, with M23 plug connection and single-occupied slots, marker tags, slots: 8



The illustration shows a version with 8 slots

### General characteristics

Nominal voltage UN	24 V DC
Max. operating voltage Umax	30 V DC
Max. current carrying capacity per path	2 A
Current carrying capacity per slot	4 A
SACB total current	12 A
Operating current of the indicator elements	≤ 5 mA
Number of positions	4
Number of slots	8
Degree of protection	IP65 / IP67
Inflammability class acc. to UL 94	V0
Ambient temperature (operation)	-20 °C ... 75 °C
Sensor/actuator connection system	M12 female connector

### Local diagnostics function

Local diagnostics	Supply voltage LED green Status display I/O Yellow LED
-------------------	---


### Master cable data

Type of connection	M23 plug connection
Tightening torque slot sensor/actuator cable	0.4 Nm
Tightening torque screw plug	0.4 Nm

### Insulation material

Housing material	PA
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	PA
Material of contact, master cable side	CU alloy
Material of contact surface, master cable side	Gold-plated
Material of threaded sleeve	Zinc die-cast
Material, O-ring	NBR

Creator: PAM	Document: DB22260619EN Version: 01	Page 1 of 3
--------------	---------------------------------------	-------------


22260619	<b>DATA SHEET</b>	
Valid from: 09.11.2018	<b>AB-B8-8-L-M23</b>	

### Pin assignment


Slot/position = Wire color or connection

- 1 / 4 (A) = 1
- 2 / 4 (A) = 2
- 3 / 4 (A) = 3
- 4 / 4 (A) = 4
- 5 / 4 (A) = 5
- 6 / 4 (A) = 6
- 7 / 4 (A) = 7
- 8 / 4 (A) = 8
- 1-4 / 1 (+ 24 V) = 11
- 1-4 / 3 (0 V) = 9+10
- 1-4 / 5 (PE) = 12

### Technical drawings and dimensions

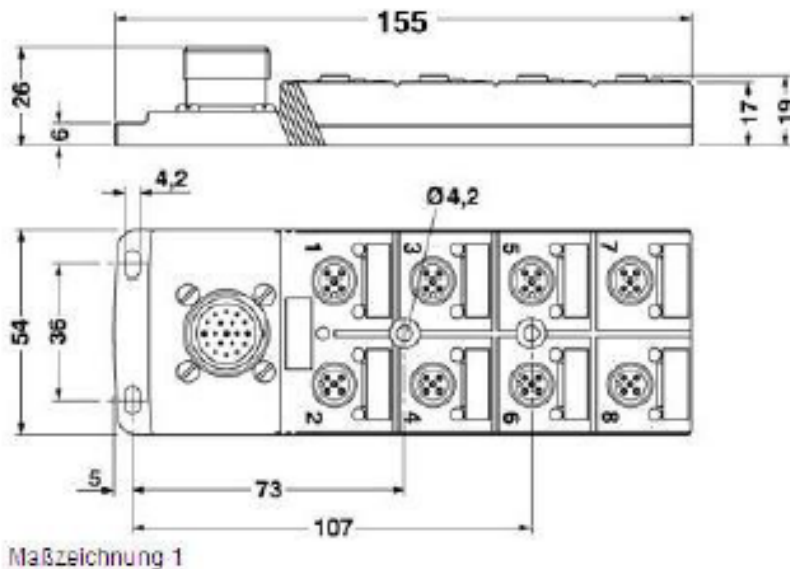


Creator: PAM	Document: DB22260619EN Version: 01	Page 2 of 3
--------------	---------------------------------------	-------------

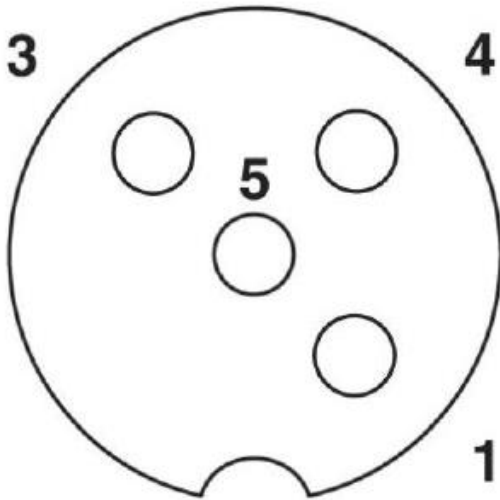

Schematic diagram 1

M12 slot, socket, 4-pos.

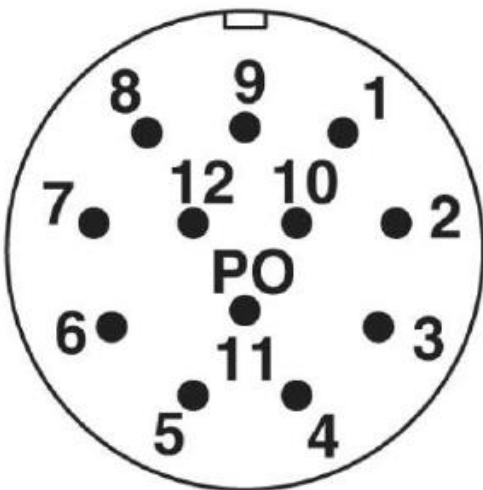

Schematic diagram 2

M23 plug connection pin, 12-pos.

**Note**

Photographs are not true to scale and do not represent detailed images of the respective products.