


DIDH 16 690 SB50.300 V2A (106 246)

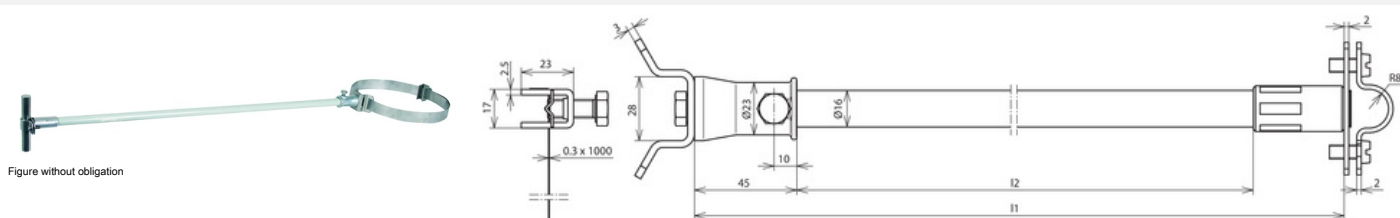

Type	DIDH 16 690 SB50.300 V2A
Part No.	106 246
Conductor support Rd	16 mm
Material of conductor holder	StSt
Length (l1)	690 mm
Insulating clearance (l2)	605 mm
Clamping range of pipe	50-300 mm
Diameter Ø of spacer	16 mm
Colour of spacer	light grey (RAL 7035) •
Conductor routing	fixed
Rod / conductor holder	2-screw cleat
Material of spacer	GRP
Material factor km	0.7
Permanent temperature range	-50 °C ... +100 °C
Material of fixing bush	ZDC
Material of fixing element	StSt
Type	UV stabilised and weather resistant
Dimension of strap (w x d)	25 x 0.3 mm
Max. gust wind speed installationpossibility 3	135 km/h
Standard	DIN IEC/TS 62561-8 (VDE V 0185-561-8)
Weight	608 g
Customs tariff number	85389099
GTIN	4013364098954
PU	1 Stk

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

Verisons with other spacer bar lengths are available upon request.