

Product Environmental Profile

Acti9 Auxiliary Indicating Contacts for Protective Devices






General information

Representative product	Acti9 Auxiliary Indicating Contacts for Protective Devices - A9A26924
Description of the product	Acti9 IOF 240-415V AC 24-130V DC OC contact is a auxiliary contact with OPEN and CLOSE indicator function.
Functional unit	The functional unit of the ACTI9 IOF 240-415VAC 24-130VDC OC CONTACT is to indicate locally and remotely electrical device status for 20 years in accordance with EN/IEC 60947-5-1.



Constituent materials

Reference product mass 46 g including the product, its packaging and additional elements and accessories

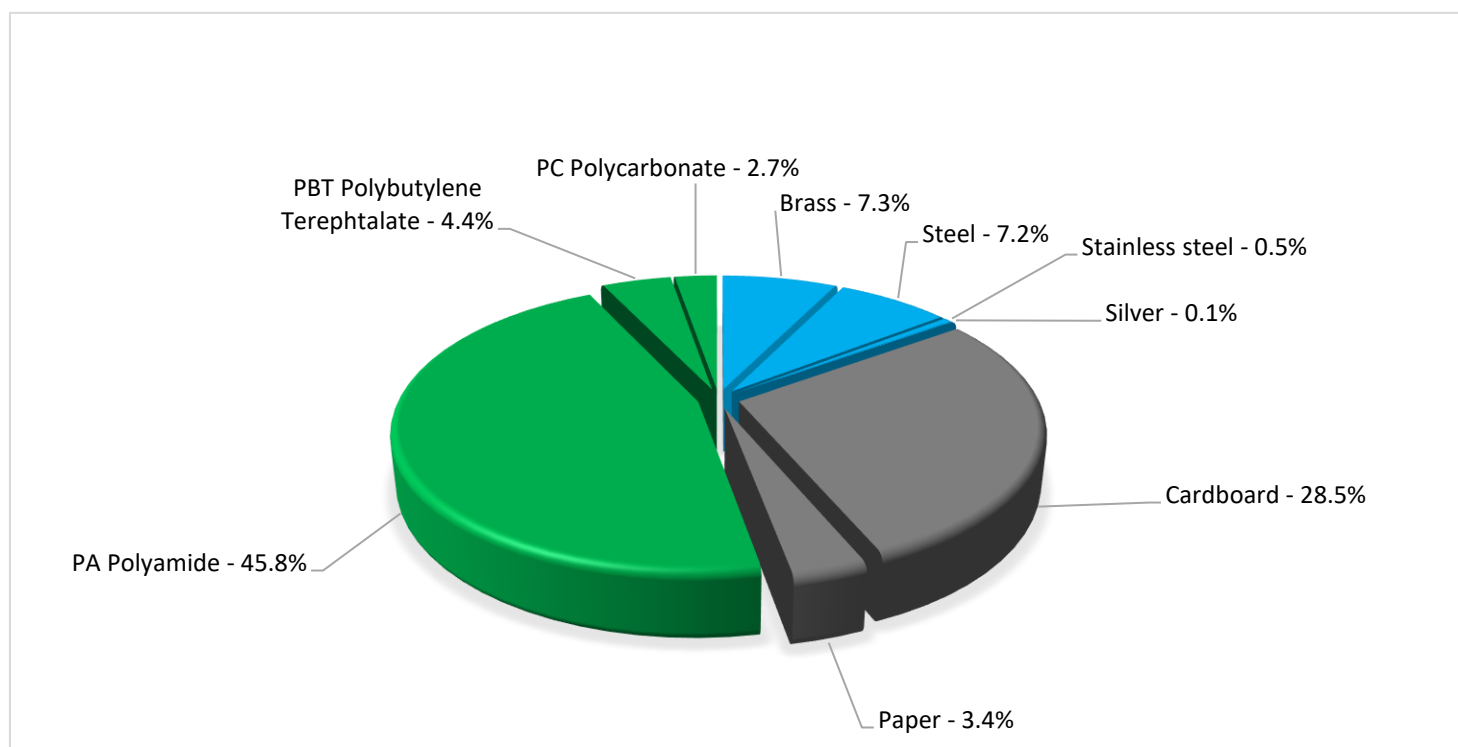

Plastics	52.9%
Metals	15.2%
Others	31.9%



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate– BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>

Additional environmental information


The Acti9 Auxiliary Indicating Contacts for Protective Devices presents the following relevant environmental aspects

Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 14.6 g, consisting of cardboard(89.3%), paper(10.7%) Packaging recycled materials is 100% of total packaging mass. Product distribution optimised by setting up local distribution centres
Installation	Ref A9A26924 does not require any installation operations
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials This product contains plastic parts with brominated flame retardant (1.56152g) that should be separated from the stream of waste so as to optimize end-of-life treatment. The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME). Recyclability potential: 20%

Environmental impacts

Reference life time	20 years			
Product category	Other equipments - Passive product - continuous operation			
Installation elements	The disposal of the packaging material is accounted for 31.7% during the installation phase.			
Use scenario	load rate / rated current (In): 100% load percentage of utilization time: 100%			
Geographical representativeness	France			
Technological representativeness	Acti9 IOF 240-415V AC 24-130V DC OC contact is a auxiliary contact with OPEN and CLOSE indicator function.			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: India	Electricity mix; AC; consumption mix, at consumer; 230V; FR	Electricity mix; AC; consumption mix, at consumer; 230V; FR	Electricity mix; AC; consumption mix, at consumer; 230V; FR

Compulsory indicators		Acti9 Auxiliary Indicating Contacts for Protective Devices - A9A26924					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	2.52E-04	2.52E-04	0*	0*	7.93E-08	0*
Contribution to the soil and water acidification	kg SO ₂ eq	1.75E-03	1.40E-03	2.71E-05	3.28E-06	3.10E-04	9.74E-06
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	3.62E-04	2.66E-04	6.24E-06	7.98E-07	8.59E-05	3.03E-06
Contribution to global warming	kg CO ₂ eq	6.47E-01	3.64E-01	5.94E-03	7.88E-04	2.70E-01	6.60E-03
Contribution to ozone layer depletion	kg CFC11 eq	3.71E-07	3.51E-07	0*	0*	2.04E-08	2.32E-10
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	1.69E-04	1.33E-04	1.93E-06	2.45E-07	3.33E-05	9.88E-07
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m ³	7.10E-03	2.00E-03	0*	0*	5.09E-03	4.86E-06
Total Primary Energy	MJ	3.76E+01	4.37E+00	8.39E-02	1.03E-02	3.31E+01	4.61E-02

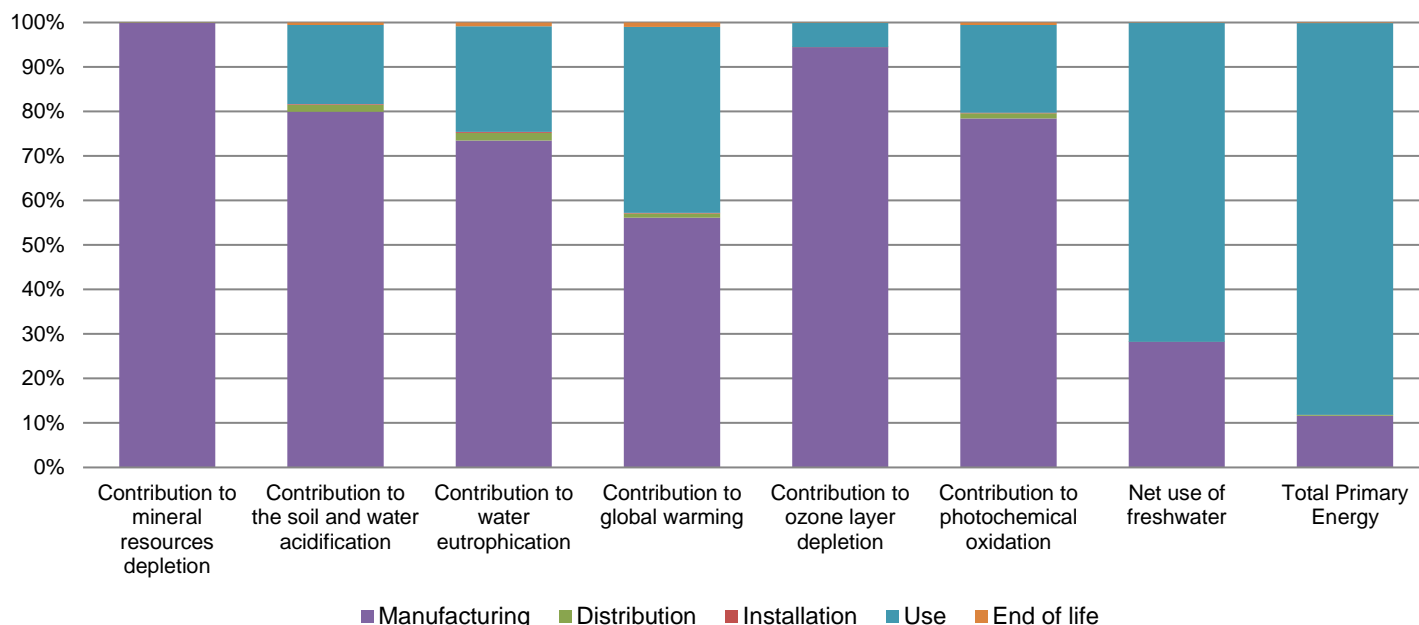

Optional indicators		Acti9 Auxiliary Indicating Contacts for Protective Devices - A9A26924					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	5.07E+00	2.51E+00	8.34E-02	1.02E-02	2.43E+00	3.70E-02
Contribution to air pollution	m³	7.94E+01	5.87E+01	2.52E-01	3.14E-02	2.01E+01	3.39E-01
Contribution to water pollution	m³	1.22E+02	1.06E+02	9.76E-01	1.20E-01	1.48E+01	4.43E-01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	4.71E-04	4.71E-04	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1.92E-01	1.87E-01	1.12E-04	0*	5.26E-03	5.07E-05
Total use of non-renewable primary energy resources	MJ	3.75E+01	4.18E+00	8.38E-02	1.03E-02	3.31E+01	4.60E-02
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	-9.25E-02	-9.79E-02	0*	0*	0*	0*
Use of renewable primary energy resources used as raw material	MJ	2.85E-01	2.85E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	3.69E+01	3.63E+00	8.38E-02	1.03E-02	3.31E+01	4.60E-02
Use of non renewable primary energy resources used as raw material	MJ	5.54E-01	5.54E-01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1.19E+00	7.37E-01	0*	0*	3.96E-01	5.61E-02
Non hazardous waste disposed	kg	5.22E-01	4.96E-01	2.11E-04	1.07E-04	2.60E-02	1.41E-04
Radioactive waste disposed	kg	3.88E-04	1.18E-04	1.50E-07	0*	2.70E-04	2.26E-07
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	2.53E-02	4.57E-03	0*	1.45E-02	0*	6.21E-03
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	1.21E-03	0*	0*	0*	0*	1.21E-03
Exported Energy	MJ	4.60E-05	4.33E-06	0*	4.17E-05	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00576-V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Verifier accreditation N°	VH39	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Date of issue	06/2020	Information and reference documents	www.pep-ecopassport.org
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	External	X	
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)			
PEP are compliant with XP C08-100-1 :2016			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			



Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

SCHN-00576-V01.01-EN

© 2019 - Schneider Electric – All rights reserved

06/2020