



# MASTER TL-D Food

## MASTER TL-D Food 30W/79 SLV/25

The TL-D Food lamp makes the appearance of meat and bakery products more fresh and tasty. It can be applied for food illumination in butcher shops, bakeries, supermarkets etc.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]

Light Technical	
Color Code	79
Luminous Flux	1,300 lumen
Color Designation	Food
Correlated Color Temperature (Nom)	3800 K
Luminous Efficacy (rated) (Nom)	43 lm/W
Color rendering index (CRI)	74

Operating and Electrical	
Power Consumption	30.0 W
Lamp Current (Nom)	0.360 A
Voltage (Nom)	98 V
Voltage (Nom)	98 V

Controls and Dimming	
Dimmable	Yes

Mechanical and Housing	
Bulb Shape	T8 [26 mm (T8)]


Approval and Application	
Mercury (Hg) Content (Nom)	5.0 mg
Energy Consumption kWh/1000 h	37 kWh

Product Data	
Full product code	871150070624940
Order product name	MASTER TL-D Food 30W/79 SLV/25
Order code	928025402043
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material number (12NC)	928025402043
Full product name	MASTER TL-D Food 30W/79 SLV/25
EAN/UPC - Case	8711500613103


# MASTER TL-D Food

## Dimensional drawing

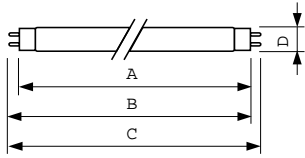



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Food 30W/79 SLV/25	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm

## Photometric data



Spectral Power Distribution Colour - MASTER TL-D Food 30W/79 SLV/25

## Lifetime

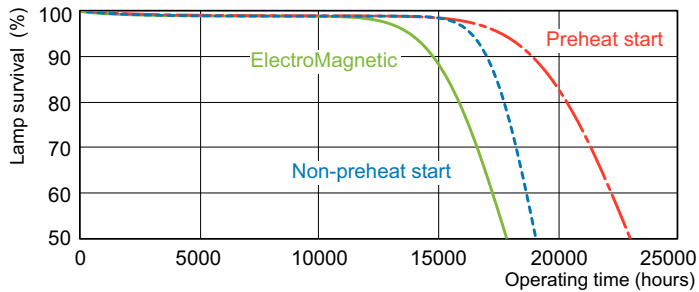


Life Expectancy Diagram - MASTER TL-D Food 30W/79 SLV/25

Life Expectancy Diagram - MASTER TL-D Food 30W/79 SLV/25

# MASTER TL-D Food

## Lifetime

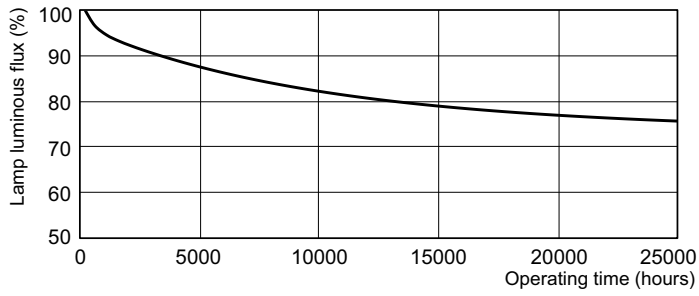

Lumen Maintenance Diagram - MASTER TL-D Food 30W/79 SLV/25

