


# Product Environmental Profile

WANDER SOCKET PK 16A IP44 220V 2PT + WANDER PLUG PK 16A IP44 220V 2PT






## General information

Representative product	WANDER SOCKET PK 16A IP44 220V 2PT + WANDER PLUG PK 16A IP44 220V 2PT - PKY16M413 + PKX16M423
Description of the product	The representative product used for the analysis is wander socket PratiKa 16A IP44 220V 2PT (PKY16M423) plus a wander plug PratiKa 16A IP44 220V 2PT (PKX16M423)
Functional unit	to ensure an electrical connection for 20 years in accordance with the relevant standards



## Constituent materials

Reference product mass	286 g including the product, its additional elements and accessories
------------------------	--

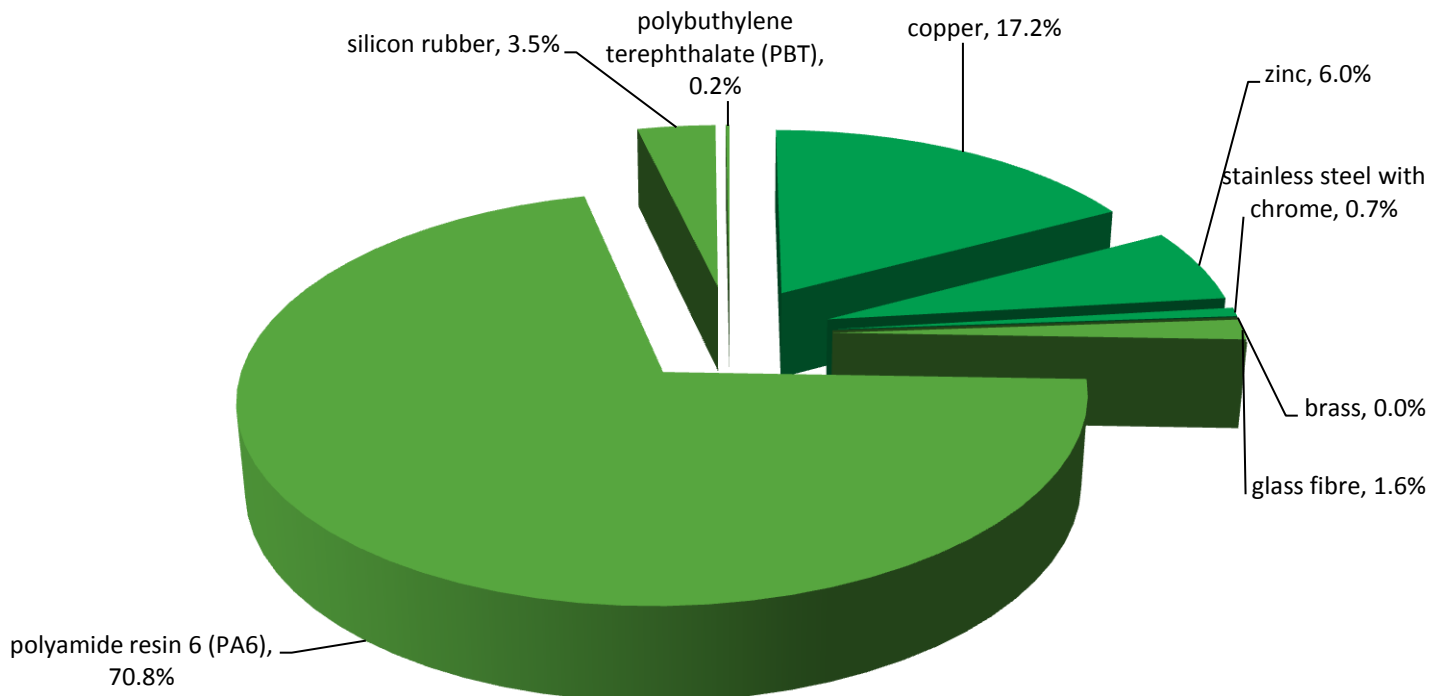

## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>

## Additional environmental information


The WANDER SOCKET PK 16A IP44 220V 2PT + WANDER PLUG PK 16A IP44 220V 2PT presents the following relevant

<b>Design</b>	Indicate all the eco-design improvements brought to the product at the design phase compared to previous offer range
<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 0 g, consisting of cardboard (100%)
<b>Installation</b>	Ref PKY16M413 + PKX16M423 does not require any installation operations
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials No special end-of-life treatment required. According to countries' practices this product can enter the usual end-of-life treatment process. Recyclability potential: <b>20%</b> Based on Eco'DEEE method

## Environmental impacts

<b>Reference life time</b>	20 years			
<b>Product category</b>	Passive products - continuous operation			
<b>Installation elements</b>	No special components needed			
<b>Use scenario</b>	Product dissipation is 3.52 W full load, loading rate is 30% and service uptime percentage is 100%			
<b>Geographical representativeness</b>	Europe			
<b>Technological representativeness</b>	The representative product used for the analysis is wander socket PratiKa 16A IP44 220V 2PT (PKY16M423) plus a wander plug PratiKa 16A IP44 220V 2PT (PKX16M423)			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: Europe	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		WANDER SOCKET PK 16A IP44 220V 2PT + WANDER PLUG PK 16A IP44 220V 2PT - PKY16M413 + PKX16M423					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	8.42E-05	6.76E-05	1.48E-09	0.00E+00	1.66E-05	8.70E-10
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	2.76E+00	3.16E-03	1.68E-04	0.00E+00	2.75E+00	9.02E-05
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	1.05E-01	1.38E-03	3.88E-05	0.00E+00	1.03E-01	2.80E-05
Contribution to global warming	kg CO <sub>2</sub> eq	3.67E+02	2.31E+00	3.69E-02	0.00E+00	3.64E+02	6.05E-02
Contribution to ozone layer depletion	kg CFC11 eq	8.86E-05	1.21E-07	7.48E-11	0.00E+00	8.85E-05	2.14E-09
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	1.30E-01	2.08E-04	1.20E-05	0.00E+00	1.30E-01	9.15E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	9.58E-01	8.42E-03	3.30E-06	0.00E+00	9.50E-01	4.48E-05
Total Primary Energy	MJ	7.41E+03	3.35E+01	5.22E-01	0.00E+00	7.38E+03	4.74E-01

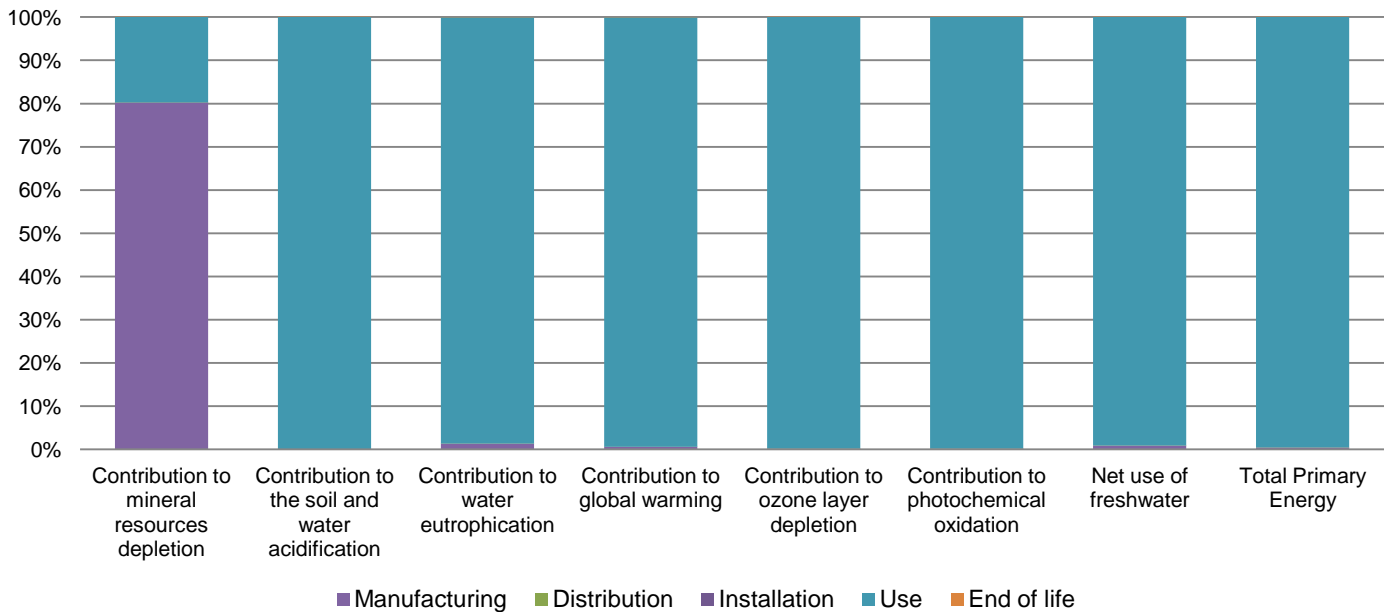

Optional indicators		WANDER SOCKET PK 16A IP44 220V 2PT + WANDER PLUG PK 16A IP44 220V 2PT - PKY16M413 + PKX16M423					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	3.78E+03	2.79E+01	5.18E-01	0.00E+00	3.75E+03	3.90E-01
Contribution to air pollution	m <sup>3</sup>	1.60E+04	4.06E+02	1.57E+00	0.00E+00	1.56E+04	3.15E+00
Contribution to water pollution	m <sup>3</sup>	1.53E+04	6.02E+01	6.07E+00	0.00E+00	1.53E+04	4.09E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	7.44E-03	7.44E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Total use of renewable primary energy resources	MJ	5.28E+02	2.27E-01	6.95E-04	0.00E+00	5.28E+02	4.69E-04
Total use of non-renewable primary energy resources	MJ	6.88E+03	3.33E+01	5.21E-01	0.00E+00	6.85E+03	4.74E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	5.28E+02	2.27E-01	6.95E-04	0.00E+00	5.28E+02	4.69E-04
Use of renewable primary energy resources used as raw material	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	6.88E+03	2.70E+01	5.21E-01	0.00E+00	6.85E+03	4.74E-01
Use of non renewable primary energy resources used as raw material	MJ	6.32E+00	6.32E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of non renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of renewable secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	5.93E+00	5.41E+00	0.00E+00	0.00E+00	0.00E+00	5.19E-01
Non hazardous waste disposed	kg	1.36E+03	3.15E-02	1.31E-03	0.00E+00	1.36E+03	1.30E-03
Radioactive waste disposed	kg	1.11E+00	1.64E-05	9.34E-07	0.00E+00	1.11E+00	2.10E-06
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	6.73E-02	8.54E-03	0.00E+00	0.00E+00	0.00E+00	5.87E-02
Components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for energy recovery	kg	1.26E-02	1.59E-03	0.00E+00	0.00E+00	0.00E+00	1.10E-02
Exported Energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Life cycle assessment performed with EIME version EIME v5.5, database version 2015-04.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration N°	SCHN-00021-V01.01-EN	Applicable PCR	PCR-ed3-EN-2015 04 02
Verifier accreditation N°	VH08	Applicable PSR	PSR-005-ed1-EN-2012 12 11
Date of issue	2016/4/11	Program information	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
		Period of validity	5 years
Independent verification of the declaration and data, according to ISO 14025:2010			
Internal	External	X	
Compliant with ISO 14025:2010 Type III environmental declarations			
PCR review was conducted by an expert panel chaired by P. Osset (Solinnen).			
The content of this PEP cannot be compared with content based on another program			



Schneider Electric Industries SAS

35, rue Joseph Monier  
CS 30323  
F- 92506 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric

SCHN-00021-V01.01-EN

© 2015 - Schneider Electric – All rights reserved

2016/4/11