

Product Data Sheet

GW10672



CHORUSMART - Domestic range



Flush-mounting axial dimmer module. An axial push-buttons on the front for switching an ON/OFF load (bistable/momentary function) or a timed ON load via an output contact with potential. The device must be completed with the front buttons key available. The device has N°3 DIP-switches, located on the back of the device, for feature configuration.

Description	Interruttore assiale	Power supply	100 ÷ 240 V ac - 50/60 Hz
No. modules	2	No. input channels	2
Local control	Via 2 front push buttons (to complete with button key)	Auxiliary input channel voltage	100 ÷ 240 V ac - 50/60 Hz
Stocking temperature	-25 ÷ +70 °C	N. canali ingresso LED	-
Working temperature	-5 ÷ +45 °C	Tensione canali ingressi LED	-
Relative humidity (non-condensative)	Max 93%	No. output channels	1
Front light signaling	Blue led	Output contacts	-
Wiring terminals	With screw	240 V ac Incandescent-halogen lamps	Max 1000 W
Terminal tightening capacity stranded cables (mm ²)	Max. 1,5	240 V ac LED lamps	Max 100 W (max 5 lampade)
Terminal tightening capacity solid cables (mm ²)	Max. 1,5	Loads piloted from electronic transformers 240 V ac	Max 250 VA
Context	Interno, luoghi asciutti	240 V Fluorescent lamps	Max 120 W (max 6 lampade)
IP degree	IP20 (with button key)	Load control	-
Standard	2014/35/EU (LVD), 2014/30/EU (EMC), 2011/65/EU + 2015/863 (RoHS), EN 60669-2-1, EN 60669-1, EN IEC 63000		

DIMENSIONAL

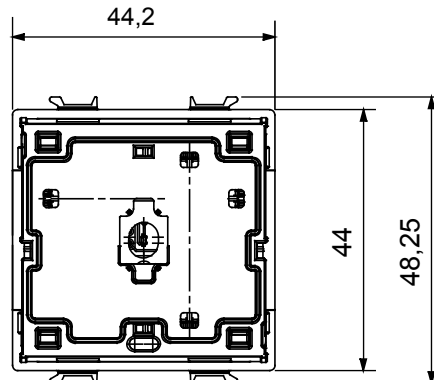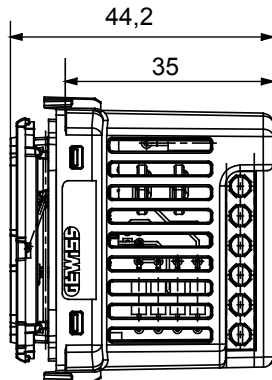

TECHNICAL SYMBOLOGY

IP

IP20 (with button key)

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 20/04/2023

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice