

WLD+40011_CASAMBI


WLD+40011_CASAMBI




Power	12 W	Voltage	48 V
Colour temperature	3000 K	Colour of light	WW
Beam angle	35 °	UGR	<19
Degree of protection (IP)	IP20		


Technical data

Code	WLD+40011_CASAMBI
Power	12 W
Nominal current	263 mA
Voltage	48 V
Energy consumption	12 kWh/1000h
Frequency	DC Hz
Protection class	III
Manufacturer of power supply	tuobo
Power factor	1
Useful luminous flux*	1200 lm (360°)
Luminous flux**	820 lm (360°)
Lamp efficacy	100 lm/W
Luminous intensity	2580 cd
Colour temperature	3000 K
Colour of light	WW
Beam angle	35 °
UGR	<19
RA	>90
Light source included	Yes
Producer of LED diodes	osram
Uniformity of color SDCM max	5
Dimmable	CASAMBI
Working temperature range	-20 to +40 °
Lifespan	50000 h
Housing material	AL+PC
Degree of protection (IP)	IP20
Colour	Black
Dimension (AxBxC)	204x23x42 mm
For use	Inside
Assembly method	NA SZYŃĘ
Application	Inside
Made in	PRC
Other	CASAMBI ,

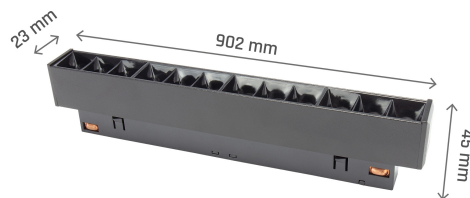





48V 





Die Montage erfolgt über ein einfaches Klick-System
zusätzlich lässt sich die Leuchte je nach Bedarf verschieben

48V 



Luminaire assembly within the track on "click" and its free arrangement

48V 



Luminaire assembly within the track on "click" and its free arrangement

