

## PHEG1.S P SN7401 (767 666)

- Earth clamp with adjustable handle and magnet
- Insulating stick with plug-in coupling as end fitting for extending the handle
- Easy transport due to detachable insulating stick



Figure without obligation

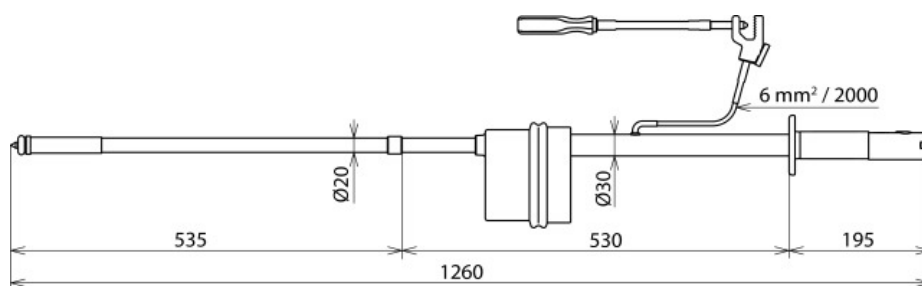


Figure without obligation

Type	PHEG1.S P SN7401
Part No.	767 666
Threshold voltage (U <sub>t</sub> )	120 V
Nominal voltage (U <sub>N</sub> )	1 ... 24 kV
Type of voltage	d.c.
Length (indicator with test prod) (l <sub>s</sub> )	765 mm
Length (insulating stick) (l <sub>i</sub> )	550 mm
Length (earthing cable)	2000 mm
Total length (l <sub>c</sub> )	1260 mm
Insertion depth (l <sub>o</sub> )	535 mm
Earth clamp	With magnet
Standard	Based on EN/IEC 61243-1 (DIN VDE 0682-411)
Temperature range	-25 °C ... +55 °C, climatic category N
For use at	▲
For	Indoor and outdoor installations
Application	Switchgear installations
Design	Two-pole
Indication	Indoor and outdoor installations, for example d.c. voltage systems (electrified rail networks, d.c. links)
Self-testing element	Yes
Material (test electrode)	Copper alloy/gal Sn
Material (test prod)	Glass-fibre reinforced polyester tube
Material (indicator)	Plastic, fully insulated
Material (insulating stick)	Glass-fibre reinforced polyester tube
Material (connecting cable)	Highly flexible copper cable
Weight	2,2 kg
Customs tariff number	90303370
GTIN	4013364157071
PU	1 Stk

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.