


# WLD PLANK CCT

WLD+20009

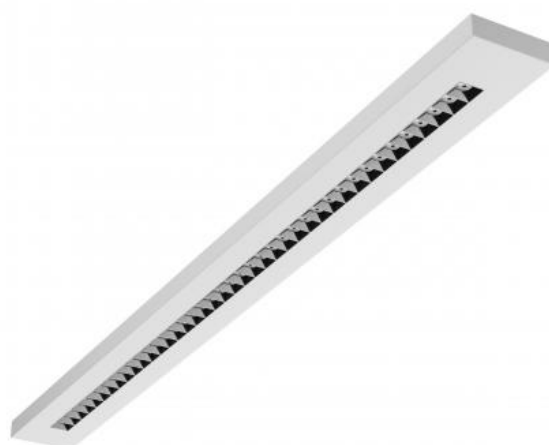

Power	<b>20/30/40 W</b>	Voltage	<b>230 V</b>
Colour temperature	<b>2700/4000/6000 K</b>	Colour of light	<b>CCT</b>
Beam angle	<b>40 °</b>	Degree of protection (IP)	<b>IP20</b>

## Technical data


---

Code	WLD+20009
Power	20/30/40 W
Nominal current	185 mA
Voltage	230 V
Energy consumption	40 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power factor	0.95
Useful luminous flux*	4350 lm (360°)
Luminous flux**	1500/2250/3000 lm (360°)
Lamp efficacy	109 lm/W
Luminous intensity	5900 cd
Colour temperature	2700/4000/6000 K
Colour of light	CCT
Beam angle	40 °
RA	90
Light source included	Yes
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	50000 h
Housing material	Aluminum
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	1195x100x25 mm
For use	Inside
Assembly method	On the ceiling, Suspended
Application	Inside
Made in	PRC
Other	Light color change function 2700K/4000K/6000K ,


## Related documents

---



 User manual



 Declaration of Conformity

