


EWD MVK8.10 M10 L100 300 V4A (478 410)



Figure without obligation

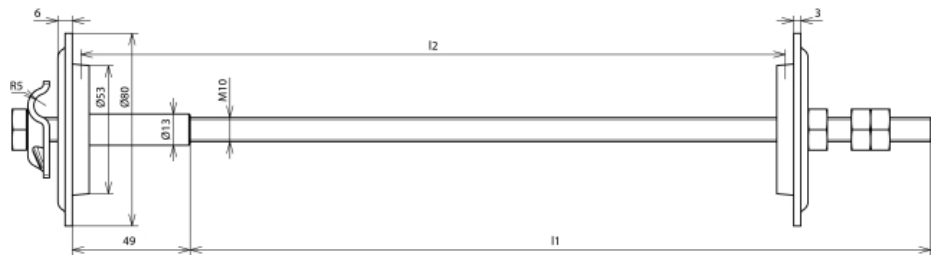

With MV clamp made of StSt (V4A) for round conductors 8–10 mm.

Water-pressure-tight wall bushing for leading earthing conductors / equipotential bonding conductors through brickwork or walls; with M10 threaded rod made of StSt.

For subsequent installation through borehole (Ø14 mm) or through spacer in the formwork.

Test for water pressure-tightness up to 1 bar features an installation depth of 10 m in stagnant water.



Arrangement:

Type	EWD MVK8.10 M10 L100 300 V4A
Part No.	478 410
Length of bushing (l2)	100-300 mm
Length of threaded rod (l1)	308 mm
Sealings	Neoprene
Sealing disc Ø	80 mm
Material of disc	StSt (V4A)
Material No.	1.4571 / 1.4404 / 1.4401
Material of threaded rod / nut	StSt
Short-circuit current (a.c. 50 Hz / d.c.) (1 s; ≤ 300 °C)	2.7 kA
Standard	EN 62561-1
Weight	580 g
Customs tariff number	85389099
GTIN	4013364136335
PU	5 Stk

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.