

Product Environmental Profile

SpaceLogic AS-P Controller

AS-P Hardware Range




General information

Representative product	SpaceLogic AS-P Controller - SXWASPXXX10001
Description of the product	The SpaceLogic AS-P Controller is a powerful device that can act as a standalone server, control I/O modules and also monitor and manage field bus devices. In a small installation, the embedded Automation Server acts as a stand-alone server, mounted on a rack together with its belonging I/O modules. In medium and large installations, functionality is distributed through multiple Automation Servers that communicate over TCP/IP.
Description of the range	AS-P Hardware Range (AX-SSC, RXASPNLRS0000, SXWASPSBX10001, SXWASPSBX10002, SXWASPSBX10A01, SXWASPSBX1S002, SXWASPXXX10002, SXWASPXXX10A01, SXWASPXXX1S001) - The models only differ in firmware/software, labels and commercial reference. The hardware, for example its weight and its consumption of energy is the same. The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with a similar technology.
Functional unit	The AS-P Controller acts as server, control I/O modules and manage field bus devices during a life-span of 10 years.

Constituent materials

Reference product mass	276 g including the product, its packaging and additional elements and accessories
------------------------	--

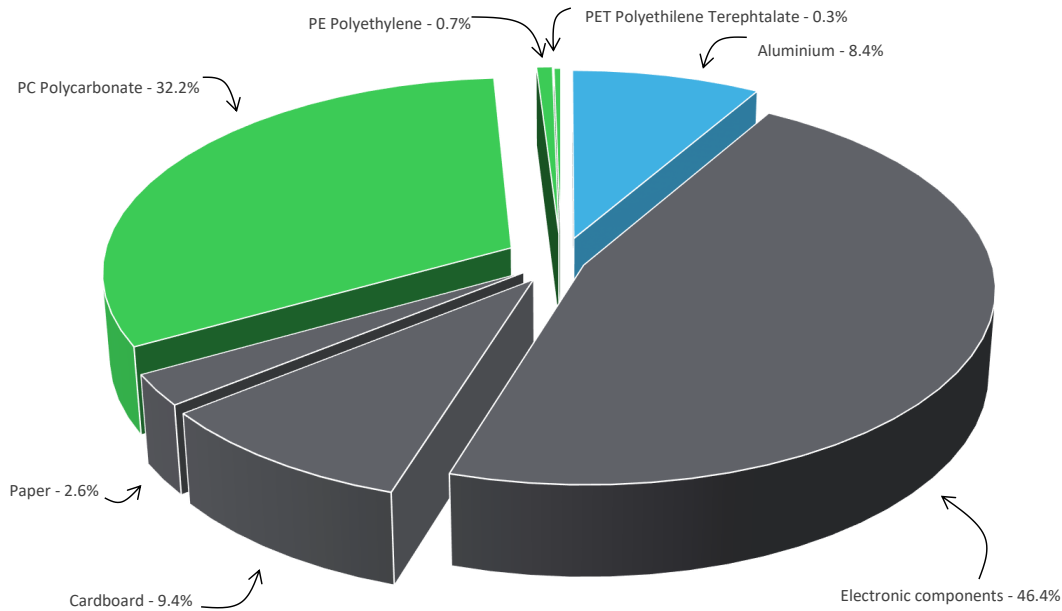

Plastic	33.2%
Metals	8.4%
Others	58.4%

Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <https://www.se.com/ww/en/work/support/green-premium/>

**Additional environmental information**

End Of Life	Recyclability potential:	17%	Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).
-------------	--------------------------	-----	---

**Environmental impacts**

Reference service life time	10 years			
Installation elements	Disposal of packaging is accounted for in the installation phase.			
Use scenario	The product is in active mode 100% of the time with a power use of 3.3W nominal, for 10 years			
Technological representativeness	The SpaceLogic AS-P Controller is a powerful device that can act as a standalone server, control I/O modules and also monitor and manage field bus devices. In a small installation, the embedded Automation Server acts as a stand-alone server, mounted on a rack together with its belonging I/O modules. In medium and large installations, functionality is distributed through multiple Automation Servers that communicate over TCP/IP.			
Geographical representativeness	Europe			
Energy model used	[A1 - A3]	[A5]	[B6]	[C1 - C4]
	Electricity Mix; Production mix; Low voltage; LT	Electricity Mix; Production mix; Low voltage; UE-27	Electricity Mix; Production mix; Low voltage; UE-27	Electricity Mix; Production mix; Low voltage; UE-27

Detailed results, including all the optional indicators mentioned in PCRred4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Mandatory Indicators		SpaceLogic AS-P Controller - SXWASPXXX10001						
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life	Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to climate change	kg CO2 eq	1.33E+02	1.36E+01	7.96E-02	4.08E-02	1.18E+02	4.70E-01	-3.41E-01
Contribution to climate change-fossil	kg CO2 eq	1.32E+02	1.35E+01	7.96E-02	4.03E-02	1.18E+02	4.57E-01	-3.31E-01
Contribution to climate change-biogenic	kg CO2 eq	2.05E-01	3.42E-02	0*	4.45E-04	1.58E-01	1.23E-02	-1.00E-02
Contribution to climate change-land use and land use change	kg CO2 eq	1.22E-08	1.22E-08	0*	0*	0*	0*	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	2.63E-06	2.04E-06	7.02E-08	7.24E-10	5.07E-07	1.73E-08	-4.42E-08
Contribution to acidification	mol H+ eq	7.77E-01	9.40E-02	3.46E-04	0*	6.76E-01	6.22E-03	-2.17E-03
Contribution to eutrophication, freshwater	kg (PO4) ³⁻ eq	3.55E-04	2.57E-05	0*	6.01E-07	3.24E-04	4.28E-06	-1.38E-06
Contribution to eutrophication marine	kg N eq	9.16E-02	1.02E-02	1.59E-04	2.24E-05	7.68E-02	4.45E-03	-1.94E-04
Contribution to eutrophication, terrestrial	mol N eq	1.27E+00	1.09E-01	1.72E-03	1.70E-04	1.15E+00	2.22E-03	-2.08E-03
Contribution to photochemical ozone formation - human health	kg COVNM eq	2.85E-01	3.73E-02	5.64E-04	5.17E-05	2.47E-01	8.86E-04	-6.80E-04
Contribution to resource use, minerals and metals	kg Sb eq	2.29E-03	2.28E-03	0*	0*	8.58E-06	0*	-9.22E-08
Contribution to resource use, fossils	MJ	3.19E+03	1.69E+02	9.66E-01	0*	3.02E+03	2.66E+00	-4.40E+00
Contribution to water use	m3 eq	8.79E+01	4.74E+00	0*	0*	3.94E+00	7.93E+01	-6.97E-02

Additional indicators for the French regulation are available as well

Inventory flows Indicators			SpaceLogic AS-P Controller - SXWASPXXX10001					
Inventory flows	Unit	Total	Manufact.	Distribution	Installation	Use	End of Life	Benefits
			[A1 - A3]	[A4]	[A5]	[B1 - B7]	[C1 - C4]	[D]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	5.86E+02	6.12E+00	0*	0*	5.80E+02	3.48E-01	-1.27E-01
Contribution to use of renewable primary energy resources used as raw material	MJ	8.83E-02	8.83E-02	0*	0*	0*	0*	-1.27E-01
Contribution to total use of renewable primary energy resources	MJ	5.86E+02	6.20E+00	0*	0*	5.80E+02	3.48E-01	-2.54E-01
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	3.19E+03	1.64E+02	9.66E-01	0*	3.02E+03	2.66E+00	-4.40E+00
Contribution to use of non renewable primary energy resources used as raw material	MJ	4.78E+00	4.78E+00	0*	0*	0*	0*	0.00E+00
Contribution to total use of non-renewable primary energy resources	MJ	3.19E+03	1.69E+02	9.66E-01	0*	3.02E+03	2.66E+00	-4.40E+00
Contribution to use of secondary material	kg	2.39E-02	2.39E-02	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m³	2.76E-01	7.26E-02	9.40E-05	0*	9.70E-02	1.06E-01	-1.66E-04
Contribution to hazardous waste disposed	kg	4.24E+01	3.99E+01	0*	0*	2.21E+00	3.00E-01	-2.80E-02
Contribution to non hazardous waste disposed	kg	2.14E+01	4.19E+00	0*	6.16E-02	1.70E+01	1.09E-01	-7.23E-01
Contribution to radioactive waste disposed	kg	6.00E-03	2.40E-03	1.58E-05	5.37E-06	3.57E-03	6.40E-06	-4.38E-04
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	2.99E-02	1.76E-05	0*	5.50E-03	0*	2.43E-02	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	1.49E-02	0*	0*	1.49E-02	0*	0*	0.00E+00
Contribution to biogenic carbon content of the product	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to biogenic carbon content of the associated packaging	kg de C	0.00E+00	0*	0*	0*	0*	0*	0.00E+00


* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v5.9.4, database version 2022-01 in compliance with ISO14044.

Detailed results, including all the optional indicators mentioned in PCRed4, and the split of the Use Phase (B1 to B7), are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range, ratios to apply can be provided upon request

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	SCHN-00900-V01.01-EN	Drafting rules	PEP-PCR-ed4-2021 09 06
Verifier accreditation N°	VH48	Information and reference documents	www.pep-ecopassport.org
Date of issue	2023/03/16	Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal External X			
The PCR review was conducted by a panel of experts chaired by Julie ORGELET (DDemain)			
PEP are compliant with XP C08-100-1 :2016 or EN 50693:2019			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			
			

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.se.com

SCHN-00900-V01.01-EN

Published by Schneider Electric

© 2022 - Schneider Electric – All rights reserved

2023/03/16