



# MASTER UltraEfficient LED bulb

## MAS LEDBulbND2.3-40W E27830 A60CL G EELA

This is the most efficient LED bulb from Philips brand. 210lm/W helps to concrete the company statement of sustainability. 50000 hour lifetime helps to extend the replacement cycle to reduce the waste. This is not only the high SPEC product, but also keep the light quality of Philips brand

### Product data

General Information	
Cap-Base	E27 [E27]
Nominal lifetime	50,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Sphere

Light Technical	
Color Code	830 [CCT of 3000K]
Luminous Flux	485 lumen
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	210.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	2.3 W
Lamp Current (Nom)	30 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.4
Voltage (Nom)	220-240 V

Temperature	
T-Case Maximum (Nom)	35 °C

Controls and Dimming	
Dimmable	No

# MASTER UltraEfficient LED bulb

## Mechanical and Housing

Bulb Finish	Clear
Bulb Shape	A60 [A 60mm]

## Approval and Application


Energy Consumption kWh/1000 h	3 kWh
EPREL Registration Number	1,370,027
CE mark	Yes
EU RoHS compliant	Yes

## Product Data

Full product code	871951442073100
-------------------	-----------------


Order product name	MAS LEDBulbND2.3-40W E27830 A60CL G EELA
Order code	929003066402
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material number (12NC)	929003066402
Full product name	MAS LEDBulbND2.3-40W E27830 A60CL G EELA
EAN/UPC - Case	8719514420748

## Dimensional drawing




Product	D	C
MAS LEDBulbND2.3-40W E27830 A60CL G EELA	60 mm	105 mm

## Photometric data

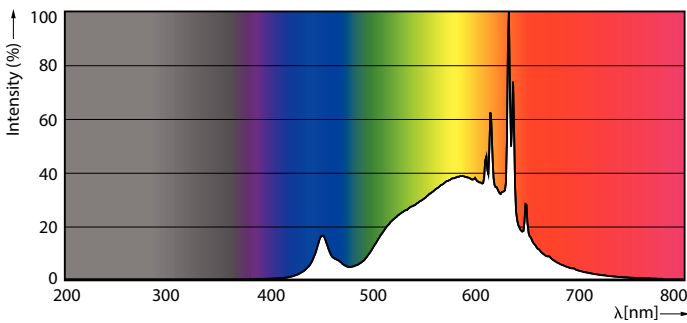


Spectral Power Distribution Colour - MAS LEDBulbND2.3-40W E27830 A60CL G EELA



Light Distribution Diagram - MAS LEDBulbND2.3-40W E27830 A60CL G EELA



# MASTER UltraEfficient LED bulb

## Photometric data



Technical Parameters 43 Philips Lighting B.V. Page 10

## Lifetime

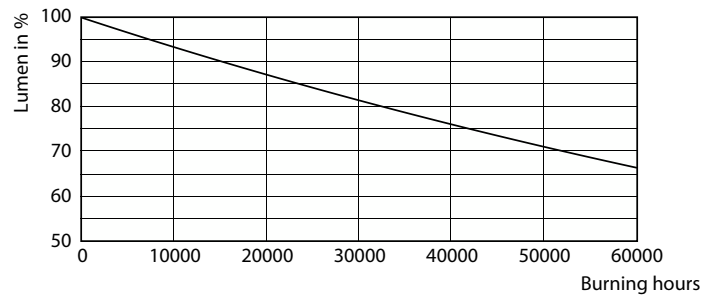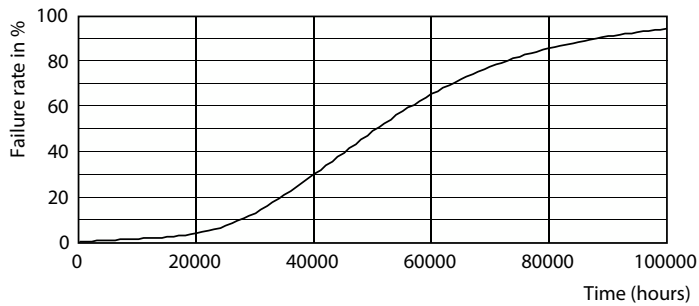

Life Expectancy Diagram - MAS LEDBulbND2.3-40W E27830 A60CL G EELA

Lumen Maintenance Diagram - MAS LEDBulbND2.3-40W E27830 A60CL G EELA

